
# **HUMA%**

# LGB-26TPYR

LCD Digital and Analogue TV
Digital 2 Tuner PVR Built-in

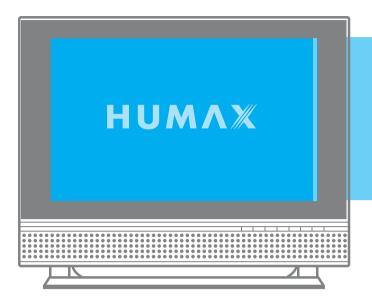

LCD Digital and Analogue TV

# Caution







**To reduce the risk of electric shock**, do not remove cover(or back). No user serviceable parts inside. Refer servicing to qualified service personnel. Indicates a situation which, if not avoided, could damage the equipment or other apparatus.

**This symbol** indicates **dangerous voltage** inside the LCD-TV that presents a risk of electric shock or personal injury. Indicates a hazardous situation which, if not avoided, could result in serious injury.

This symbol indicates important instructions accompanying the LCD-TV.

Read this manual carefully and make sure you understand the instructions provided. For your safety, check what the result of each action will be. Throughout the whole manual, pay special attention to the following marks that indicate hazardous situations. Indicates additional information to the user to make the user aware of possible problems and information of any importance to help the user to understand, to use and to maintain the installation.

The information in this document is subject to change without notice.

# Copyright © 2005 HUMAX Corporation)

Not to be copied, used or translated in part or whole without **HUMAX's** prior consent in writing except approval of ownership of copyright and copyright law.

# **Warranty**

**HUMAX** does not have any responsibility for direct, indirect, accidental and other damage caused by the use of the information contained in this manual.

# **Trademarks**

VIACCESS™ is a trademark of France Telecom.

CryptoWorks(TM) is a trademark of Philips Electronics N.V.

Irdeto is a trademark of Mindport BV.

Nagravision is a registered trademark of KUDELSKI S.A.

Conax is a trademark of Telenor Conax AS.

'Dolby' and the double-D symbol are trademarks of Dolby Laboratories.

Manufactured under the license from Dolby Laboratories.



TruSurround XT is a trademark of SRS Labs, Inc.

TruSurround XT technology is incorporated under license from SRS Labs, Inc.

Thank you for purchasing a HUMAX LCD-TV. Please read this user manual carefully in order to safely install, use and maintain the LCD-TV at maximum performance. Keep this user manual next to your LCD-TV to ensure the best performance possible.

# Safety Instructions

This LCD-TV has been engineered and manufactured to assure your safety. You can prevent serious electrical shock and other hazards by keeping in mind the following:



Do not place anything heavy, wet or magnetic on the LCD TV or the power cord. Never cover the ventilation openings with any material and never touch them with metalic or inflammable materials.



Avoid operating the LCD-TV in extreme heat, humidity or areas affected by dust.



+ Temperature : 0~50°C + Humidity: 20~90RH



Be sure to turn the LCD-TV off before plugging the power cord into the socket. Make sure that the power cord and the other cords are securely and correctly



Overloaded AC outlets and extension cords are dangerous, as are frayed power cords and broken plugs, which may cause electric shock or fire. Call your service technician for replacement.



Do not use sharp tools such as a pin or a pencil near the LCD-TV, as they may scratch the LCD surface.



Do not use a solvent, such a benzene, to clean the LCD-TV, as it will damage the LCD surface.



The apparatus shall not be exposed to dripping or splashing.

Be careful when touching the LCD-TV. When you touch the LCD-TV, be careful not to get a cut on your fingers with an acrylic surface of the LCD-TV.

### Warning

- 1 Follow these directions in order not to damage the power cord or plug. Do not modify the power cord or plug. Do not bend or twist the power cord too much. Make sure to disconnect the power cord using the plug rather than the power code. Keep heating appliances as far as possible from the power cord in order to prevent the cover vinyl from melting.
- 2 Follow these directions. Failure to follow one of them may cause an electrical shock. Do not open the main body. Do not insert metals or inflammable objects inside the LCD-TV. Do not touch the power plug with wet hands. Disconnect the power cord in case of lightning.
- 3 Do not use the LCD-TV when it is out of order. If you continue to use the LCD-TV when defective, serious damage can be caused to it. Make sure to contact your local LCD-TV distributor if the LCD-TV is out of order.
- 4 Please do not insert metal or alien substances into the slots for the modules and smart cards. In doing so it can cause damage to the LCD-TV and reduce its
- 5 Hard Disk Drive: Do not move the LCD-TV or turn the power off suddenly while the hard disk drive is running. The company shall not be liable for any corruption of data on the hard disk drive caused by the carelessness or misuse of users. This LCD-TV provides up to 40GB of hard disk drive. Do contact your LCD-TV provider when you change the hard disk drive.

### 3. Safety Instructions

# **Contents**

Before Using the TV	Package Contents ————————————————————————————————————	<del></del> 07
before using the TV	Front Panel -	<del></del> 08
	Rear Panel -	09
	Remote Control	10
	+ Main Remote Control	10
	+ Simple Remote Control	13
	+ Inserting the Batteries	14
	Thisting the batteries	17
Setting Up the TV	Mounting Device	15
<b>.</b>	+ Assembling the Stand-Base	15
	+ Installing on the Wall	15
	Connecting the External Equipment —	16
	+ Connecting the Aerial	16
	+ Connecting the PC	16
	+ Connecting the External Devices	17
	+ Connecting the DVD	17
	+ Connecting the DVI	17
Heiner the Ameleure TV	Setting the Analogue Channels	18
Using the Analogue TV	+ Setting the Analogue Channels Automatically	18
	+ Setting the Analogue Channels Manually	19
	+ Editing the Analogue Channels	20
	Basic Operation	21
	+ Powering the TV On/Off	21
	+ Changing the Input Mode	21
	+ Volume Control	21
	+ Selecting the Channel	21
	+ Choosing your Language	21
	+ Listing Channels	22
	+ Using the OK Button	22
	+ Using the Audio Button	22
	+ Setting the Sleep Time	22
	Setting the Picture	23
	+ Mode	23
	+ Colour Temperature	23
	Setting the PIP/TWIN	24
	+ PIP/TWIN	24
	+ Using the PIP Buttons in the Remote Control	25
	+ Using the Digital Channels in PIP/TWIN Mode	25
	Changing the Sound + Effect	<b>26</b> 26
	+ Auto Volume Level	26
	+ TruSurround XT	26
	+ Sound Source	26
	+ Using the Sound Button in the Remote Control	26
	Setting the Time	27
		<b>——— 27</b>
	+ Setting the Current Time	27 27
	+ Automatically Turning the TV On and Off	27
	Setting the System	28
	+ Language	28
	+ OSD Transparency	28
	+ AV2 Output	28
	+ Antenna Power	28
	+ Aspect Ratio	28
	+ Backlight Brightness	28
	Displaying the Teletext Information —	29
	Setting the PC Input	<del></del> 30

# **Contents**

Recording and Playback (PVR function)


Recording —	<del></del> 3:
+ Instant Recording	31
- Setting the Recording Quality	32
- Setting the Clipping Noise Reduction	32
+ Recording Reservation	33
- Adding Recording Reservations	33
- Editing Recording Reservations	34
+ Time Shifted Recording	35
Playback —	37
+ Programme Playback	37
+ Editing Recorded Programmes	39
- Editing Title	39
- Delete File	39
- Copy File to External Device	39
- Connecting the External HDD	40
+ Playback Control	41
- Play / Pause	41
- Rewind to Previous Scene	41
- Fast forward to Next Scene	41
- Recording	41
- Direct Jump	41
- Instant Reply	42
- Repeat between A and B	42
- Bookmark	42
HDD Control	43
+ Checking the Hard Disk Drive	43
+ Connecting the External HDD	44

# **Contents**


Using the Digital TV	Digital TV Channel Setup —	<b>—— 45</b>
osing the Digital 1 v	Basic Operation ————————————————————————————————————	<del> 46</del>
	+ Switching Channel	46
	+ Changing the Subtitle Language	46
	+ Changing an Audio Language	46
	+ Programme Information - Information Banner (I-Plate)	47
	+ MHEG Application	48
	Channel List	<b>—</b> 49
	+ Displaying and Switching Channel List	49
	+ Editing Channels	49
	+ Editing Favourite Channels	52
	Programme Guide ————————————————————————————————————	<b>—</b> 53
	+ Viewing Programme Guide Information	53
	+ Finding a Programme	54
	+ Adding Reservations by Guide	55
	Setting the Preferences	<b>—</b> 56
	+ Parental Control	56
	+ Local Setting	57
	+ Miscellaneous Settings	59
	Installation -	<del></del> 60
	+ Automatic Search	60
	+ Manual Search	61
	+ Default Setting	62
	Software Upgrade —	<del></del> 63
	+ OTA (Over the Air)	63
	+ Software Update from PC	66
	System Information —	<del></del> 67
	+ Status	67
	+ Signal Detection	67
	+ Common Interface	68
	Game —	<del></del> 68
Annondiv	Menu Map —	—— <b>6</b> 9
Appendix	+ LCD TV Menu	69
	+ PC Main Menu	69
	+ Digital TV Menu	70
	Troubleshooting —	<del> 71</del>
	+ Troubleshooting	71
	+ Error Message	72
	Specification —	<del> 74</del>
	Glossary —	<del> 75</del>
	Service and Support	<del> 76</del>

# **Package Contents**


- + Please check all package contents before using your LCD-TV.
- + Package Contents may be different according to the area.

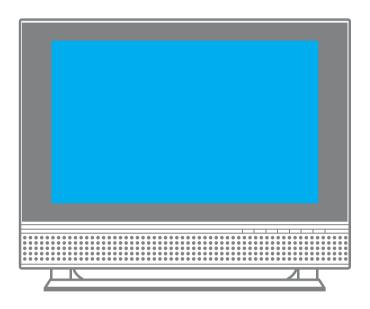


LCD - TV

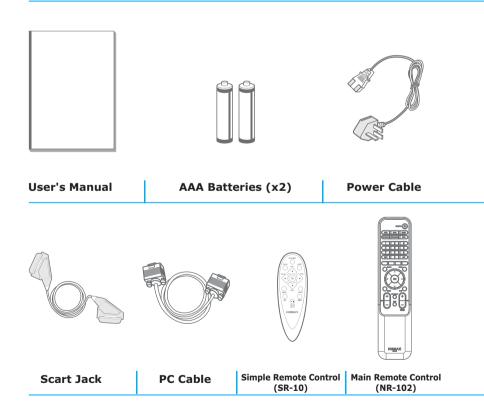

# **Front Panel**



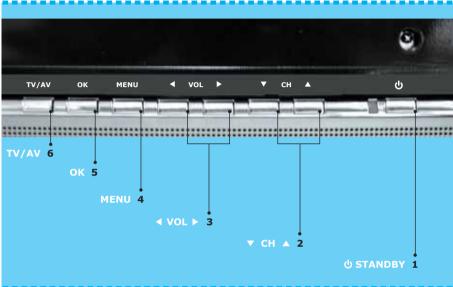

### 1. 0 : STANDBY

Switches between Operation and Standby modes. Displays Red colour when the set is in standby mode. Changes to Green colour when the set is switched on.

### 2. ▼ CH ▲

Selects a programme or a menu item.

### 3. **∢** VOL ▶

Adjusts the volume. Adjusts the menu setting.

# 4. MENU

Displays the menu.


#### 5. OK


Selects a menu or confirms the selected operation.

# 6. TV/AV

Selects the input signal (Digital TV, Analog TV, AV1, AV2, AV3, AV4, S-Video, Component, PC, DVI ).

# **Rear Panel**

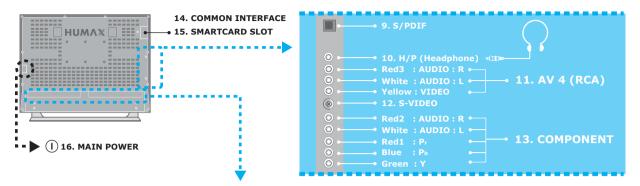

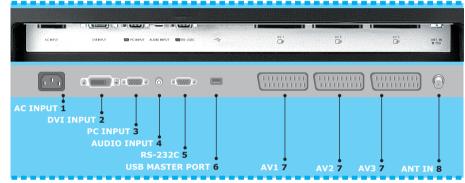

Connect the supplied AC power cord.

# 2. DVI INPUT

Connect to the digital video output jack of an external device with DVI output.

#### 3. PC INPUT

Connect to the video output jack on your PC, using the PC cable supplied.

#### 4. AUDIO INPUT

Connect to the audio output jack on your PC or your external device with DVI output.

### 5. RS-232C

Connect to the RS-232C port on your PC for software upgrade.

### 6. USB MASTER PORT

Connect to the USB port on an external HDD for moving the various digital data to/from an external HDD.

**7. AV1 (SCART 1), AV2 (SCART 2), AV3 (SCART 3)**Connect for the video and audio input/output to external devices with SCART cables.

# 8. ANT IN (Antenna In)

Connect to your aerial for digital and analogue TV signal.

# 9. S/PDIF

Connect to Dolby digital decoder for the digital audio signal output.

#### 10. H/P (Headphone)

Connect to your headphone.

# 11. AV4 (RCA)

Connect for the video and audio input to external devices with RCA cable.

### 12. S-VIDEO

Connect to an external device with S-Video output.

#### 13. COMPONENT

Connect to an external device with Component output, such as DVD.

### 14. COMMON INTERFACE

Use for one CA Module with a smart card.

#### **15. SMARTCARD SLOT**


Slot for Smartcard.

### 16. MAIN POWER

Main Power Button.

#### 9. Rear Panel

All the functions can be controlled with the Remote Control handset. Some function can also be adjusted with the buttons on the front panel of the set. Both the Main Remote Control to control the all functions and the Simple Remote Control to control the some simple functions are provided. Before you use the Remote Control handset, please install the batteries.

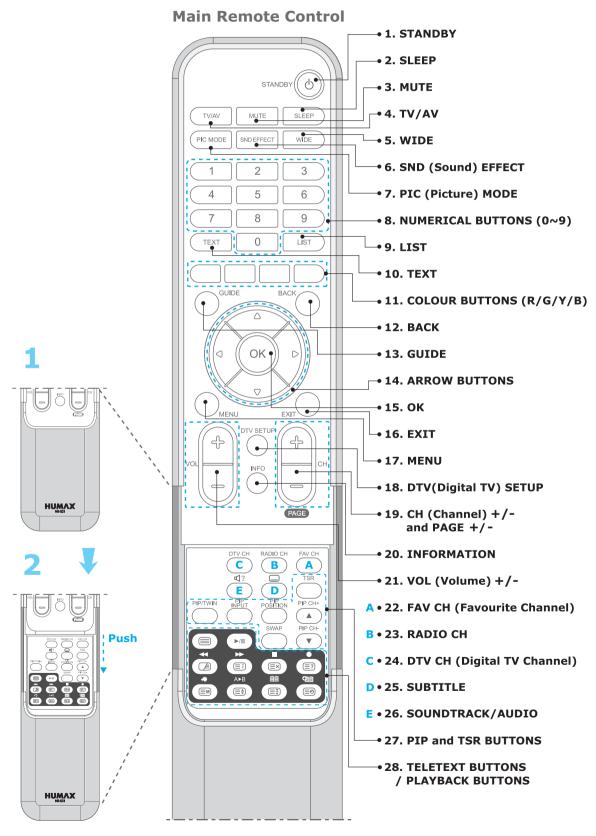

10. Remote Control

#### 1. STANDBY

Switches between Operation and Standby modes.

#### 2. SLEEP

Sets the sleep time.

#### 3. MUTE

Mutes the audio.

#### 4. TV/AV

Selects input signal between TV and another signals.

#### 5. WIDE

Sets the display format.

### 6. SND (Sound) EFFECT

Changes the sound mode.

### 7. PIC (Picture) MODE

Changes the picture mode.

# 8. NUMERICAL BUTTONS (0~9)

Enters a channel number or menu option number.

#### 9. LIST

Displays the channel list.

#### **10. TEXT**

Use the MHEG application

# 11. COLOUR BUTTONS (R/G/Y/B)

Selects colour keys for MHEG or EPG in the Digital TV mode.
Selects color keys for teletext in the Analog TV and Digital TV modes.

#### **12. BACK**

Returns to the previous menu and screen.

### 13. GUIDE

Displays the Programme Guide.

# 14. ARROW BUTTONS (▲,▼, ◀, ▶)

Moves the cursor to the up, down, left or right menu option.

#### 15. OK

Selects a menu, or confirms the selected operation and displays the channel list whilst watching a programme.

#### **16. EXIT**

Exits the main menu or Guide screen.

#### **17. MENU**

Displays the main menu.

### 18. DTV Setup

Displays the DTV Setup menu in the Digital TV mode.

### 19. CH +/- and PAGE +/-

Changes the Channel or Page.

### **20. INFORMATION**

Displays the information about the channel and programme in the Digital TV mode.

#### 21. VOL +/-

Adjusts the audio volume.

#### A • 22. FAV CH

Displays the Favourite Channel List in the Digital TV mode.

### **B • 23. RADIO CH**

Switches to digital Radio channel in the Digital TV mode.

#### C • 24. DTV CH


Switches to digital TV channel in the Digital TV mode.

### D • 25. SUBTITLE

Changes the subtitle language in the Digital TV mode.

#### E • 26. SOUNDTRACK/AUDIO

Lists alternative soundtracks enable stereo, dual or mono sound in the Digital TV mode.

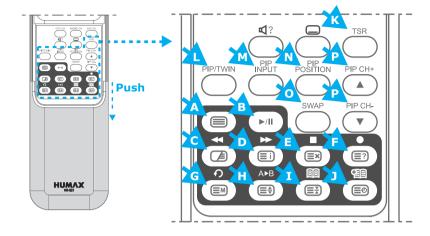

# **PIP AND TSR BUTTONS**

K. TSR (TIME SHIFTED RECORDING) Switches the Time Shifted Recording On and Off.

### L. PIP/TWIN

Changes PIP/TWIN mode.

# M. PIP INPUT

Change the PIP input mode.

# N. PIP POSITION

Control the PIP position.

### O. SWAP


Switch between main screen and PIP screen.

# P. PIP CH +/ -

Change the PIP channel.

TELETEXT BUTTONS	PLAYBACK BUTTONS (for PVR)
A. TELETEXT ( ) Activate/Deactivate the teletext service.	B. PLAY / PAUSE ( ►/II ) Plays or pause a programme.
C. MIX ( ( ) ) Displays the teletext with the broadcasting screen.	C. FAST REWIND ( ◀ ) Rewinds a programme. Each time you press this button, the scenes is rewound more faster divided into 4 steps.
<b>D. INDEX ( 圖 )</b> Displays the teletext index page.	D. FAST FORWORD ( ▶ ) Fast forwards a programme. Each time you press this button, the scene is forwarded faster divided into 4 steps.
E. UPDATE ( ( ) Displays the TV picture on the screen whilst waiting for the new teletext page.	E. STOP(■) Stops a programme.
F. REVEAL ( ( ) ) Displays the concealed information.	<b>F. RECORD ( ● )</b> Records a programme.
G. MODE ( 區) ) Programme a colour button in LIST mode.	<b>G. INSTANT REPLAY ( ♠) )</b> Replays the programme from 7 seconds previous scene.
H. SIZE ( 巨動 ) Selects a text size.	H. A-B REPEAT ( A-B ) Plays back a specified block repeatedly.
I. HOLD ( ) Holds function during teletext display. Stop the automatic page change.	I. BOOKMARK LIST (
J. SUBPAGE ( ) Search the sub-page using the sub-code.	J. ADD BOOKMARK ( 智 ) Saves the present viewing position as a bookmark.

# **Simple Remote Control**

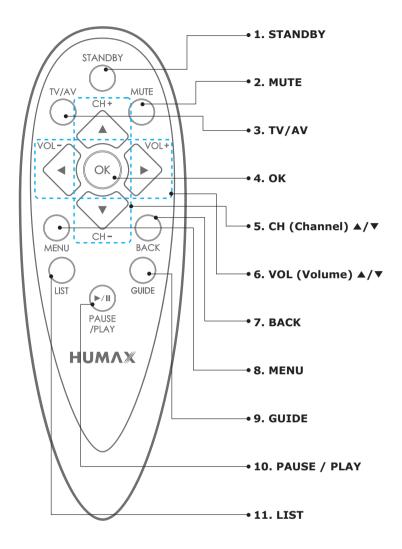

#### 1. STANDBY

Switches between Operation and Standby modes.

# 2. MUTE

Mutes the audio.

### 3. TV/AV

Selects input signal between TV and another signals.

# 4. OK

Selects a menu, or confirms the selected operation and displays the channel list whilst watching a programme.

# 5. CH (Channel) +/-

Changes the Channel.

# 6. VOL (Volume) +/-

Adjusts the audio volume.

#### 7. BACK

Returns to the previous menu and screen.

#### 8. MENU

Displays the main menu.

### 9. GUIDE

Displays the Programme Guide.

### 10. PAUSE/PLAY

Plays or pause a programme.


#### **11. LIST**

Displays the channel list.

# **Inserting the Batteries**

You must insert or replace the batteries in the remote control when you:

- + Purchase the TV.
- + Find that the remote control is no longer operating correctly.

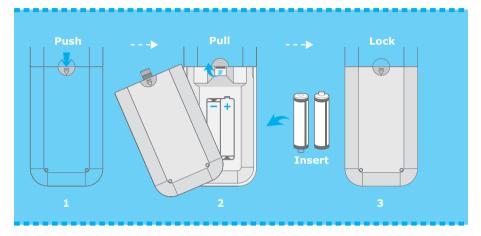

- 1. Pull the battery cover upward in the arrow direction to remove.
- 2. Insert the batteries as illustrated in the battery compartment.
- 3. Put the battery cover back.
- 4. For Simple Remote Control, insert the batteries in the same way.
- + Apply two 1.5V . batteries of AAA type. Don't mix used batteries with new
- + Remove batteries when you don't use the remote control for long periods. Liquid leakage from old batteries may cause operation failure.

# Notes for using remote control


- + Make sure these are no objects between the remote control and its sensor.
- + Don't place the remote control near a heater or damp place. Strong impact on remote controller may cause operation failure.
- + The signal from the remote control may be subjected to interference from sunlight or other strong light.

# **Mounting Device**

This describes how to set up the LCD-TV. Select the most appropriate procedure depending on your requirements.

If you encounter any problem when setting up the LCD-TV, please contact your local LCD-TV distributor.

# **Assembling the Stand-Base**

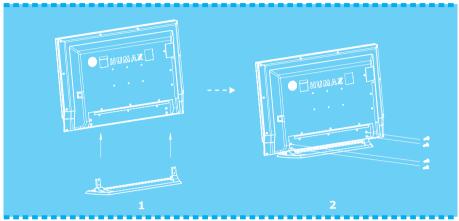


- 1. Attach your LCD-TV with the stand-base.
- 2. Firmly fix the stand-base and the LCD-TV using the 4 screws.

Note: Firmly fix the stand-base for the LCD-TV before moving it, as the stand-base may fall and could cause serious injury.

# **Installing on the Wall**

You can install the LCD-TV on the wall using a mounting bracket (sold separately). To reduce the risk of damage from falling, this LCD-TV should be secured at all times. (The LCD TV in the picture may not look exactly like yours.)

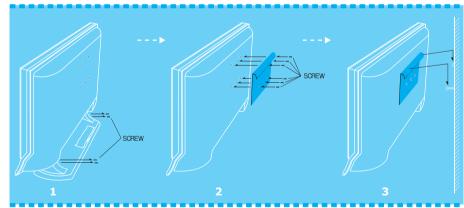

- 1. Before you install, separate the LCD-TV and stand-base.
- 2. Attach your main body bracket on the LCD-TV and fix using screws firmly.
- 3. Stick the LCD-TV with main body bracket into the wall bracket attached on the wall.
- 4. Tighten up a safety-screw.

#### Note:

- \_ Do not install the set on a weak surface such as plaster or foam board.
- Be at enough distance to open CI door between the LCD-TV and the wall when installing on the wall. If the LCD-TV is not at proper distance from the wall, the CI door may be not opened enough.


# **Connecting the External Equipment**


You can connect additional equipment, such as **VCRs**, **DVD**, **etc.** to your set. Examples are shown below.

# **Connecting the Aerial**

To view television channels correctly, a signal must be received by the set from one of following sources:


- + An outdoor aerial
- + An indoor aerial (not recommended)




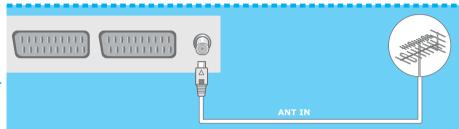

- 1. Connect the aerial to the ANT IN on the bottom of the LCD-TV.
- 2. Press the TV/AV button on the remote control.
- 3. Select Analog TV or Digital TV.





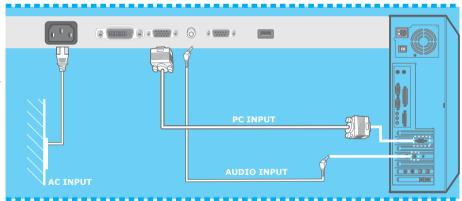


- 1. Turn off your computer and LCD-TV.
- 2. Connect a PC D-Sub cable between your PC and **PC INPUT** of the LCD-TV and then fasten the screws of both sides on the cable.
- **3.** Connect a PC Audio Cable between the Sound Output jack of the sound card on your PC and the **AUDIO INPUT** of the LCD-TV.
- Connect the Power cable to the AC INPUT jack on the rear of your LCD-TV. And connect power code to a power outlet.
- 5. Power on your PC before turning on the LCD-TV.

# **Connecting the External Equipment**


# **Connecting the External Devices**

- 1. Connect video/audio cable as indicated in the diagram.
- 2. For optimal visual image, use **S-VIDEO** lead(cable not supplied).
- **3.** If you wish to connect the optical **S/PDIF** terminal and Dolby Digital decoder to listen digital audio, connect as follows. (cable not supplied)

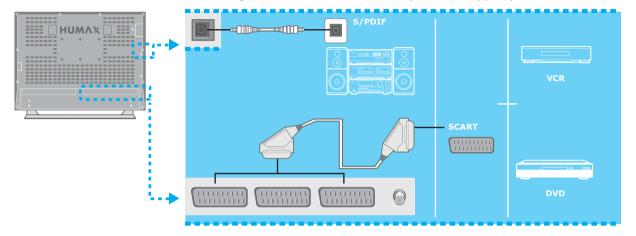


# **Connecting the DVD**

Connect **AUDIO L/R** to **AUDIO OUT** connector of the DVD. For viewing, use **S-Video** or **Component** Video Input  $(Y, P_b, P_r)$ . For listening, use **Component** Audio Input (Audio L/R).

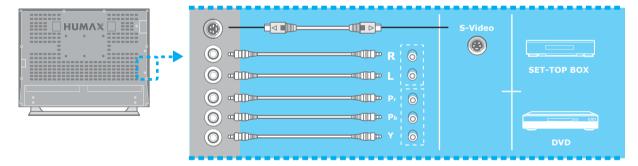

# **Connecting the DVI**

Connect the DVI cable and Audio cable as follows. For viewing, use **DVI INPUT**. For listening, use **AUDIO INPUT**.

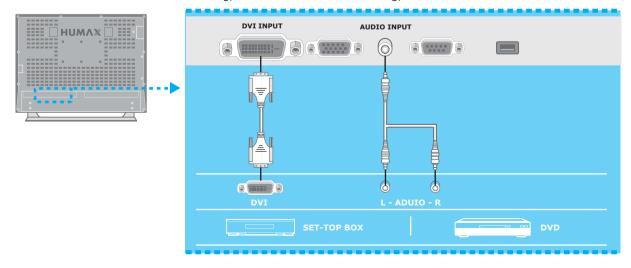

# **Setting the Analogue Channels**



# **Setting the Analogue Channels Automatically**

You can scan for the frequency ranges available to you (and availability depends on your country.) Automatically allocated programme numbers may not correspond to actual or desired programme numbers. However you can sort numbers manually and clear any channels you do not wish to watch. It's only for analogue TV mode.

- 1. Press the MENU button.
- 2. Select Channel using the ▲/▼ button, and press the OK or ▶ button.
- **3.** Select **Auto Programme** using the **△**/▼ button, and press the **OK** or **▶** button.
- **4.** Select **System** using the **△**/**▼** button, and press the **◄** or **▶** button to select a particular system.

#### **BG:I:DK**

- Select Storage From using the ▲/▼ button, and press the ◄, ▶ or NUMERICAL (0~9) button to enter the starting number to store the scanned programme.
- 6. Select Start Search using the ▲/▼ button, and press the OK or ▶ button to start auto scanning. To stop the search before it has finished, press the BACK button.

The search will end automatically. Channels are sorted and stored in an order, and then the programme originally selected is displayed.

In the digital TV mode, you can select Setup Digital Channel menu instead of Channel menu.

# **Setting the Analogue Channels**



# **Setting the Analogue Channels Manually**

The Manual Programme allows you to manually tune and arrange the channels in the order you desire. You can also assign a channel name with characters to each channel number. It's only for analogue TV mode.

- 1. Press the MENU button.
- 2. Select **Channel** using the **△**/**▼** button, and press the **OK** or **▶** button.
- Select Manual Programme using the ▲/▼ button, and press the OK or ▶ button.
- **4.** Select **System** using the **△**/**▼** button, and press the **◄** or **▶** button to select a particular system.

#### BG:I:DK

5. Select **Band** using the ▲/▼ button, and press the ◀ or ▶ button to select a particular system.


#### **V/UHF: Cable**

- 6. If you know the channel number to be stored, select Channel using the ▲/▼ button, and press the ◀, ▶ or NUMERICAL (0~9) button to select number. If you do not know the channel number, select Search using the ▲/▼ button, and press the ◀ or ▶ button to start search.
- Select Programme No. using the ▲/▼ button, and press the ◄, ▶ or NUMERICAL (0~9) button to assign a programme number into the channel
- Select Name using the ▲/▼ button, and press the OK or ▶ button to change a name.
   To select a letter (A~Z, 0~9, +, -), press the ▲/▼ button.

To select a letter (A $\sim$ Z, 0 $\sim$ 9, +, -), press the  $\blacktriangle/\blacktriangledown$  button. To move on the previous or next letter, press the  $\blacktriangleleft$  or  $\blacktriangleright$  button. To store the changing name, press the **OK** button.

- 9. Select Fine Tune using the ▲/▼ button, and press the ◀ or ▶ button to fine-tune the channel manually. If the signal is weak or distorted, you may have to fine-tune the channel manually.
- 10. When you are satisfied with your choice, press the BACK button to store the current setting values.

# **Setting the Analogue Channels**





# **Editing the Analogue Channls**

This function enables you to delete, copy, move, or skip the stored channel. It's only for analogue TV mode.

- 1. Press the MENU button.
- 2. Select **Channel** using the **△**/**▼** button, and press the **OK** or **▶** button.
- **3.** Select **Edit Programme** using the **△**/**▼** button, and press the **OK** or **▶** button. The programme list is displayed in the main screen.
- **4.** Select the **programme name** to edit with △/▼/ **4**/▶ button and press the Colour (R/G/Y/B) buttons to delete, copy, move, or skip the programme.

+ Delete button: RED + Copy button: GREEN + Move button: YELLOW + Skip button: BLUE

### **Skipping a Channel**

- \_ Select a channel to skip with the  $\blacktriangle/\blacktriangledown/\blacktriangleleft/\blacktriangleright$  button.
- \_ Press the **BLUE** button, the channel selected will change to the blue colour. Thereafter these channels will be skipped when using the **CH +/-** button.
- \_ To return to normal status, select the skipped channel and then press again the **BLUE** button for  $2\sim3$  seconds.

### **Moving a Channel**

- Select a channel to move with the  $\triangle/\nabla/\blacktriangleleft/\triangleright$  button.
- \_ Press the **YELLOW** button to select the channel you wish to move.

  Use the ▲/▼/ ◀/▶ button to move the channel to the desired position, and then press the **YELLOW** button again to store.

### **Copying a Channel**

- \_ Select a channel to copy with the  $\triangle/\nabla/\blacktriangleleft/\triangleright$  button.
- \_ Press the **GREEN** button.


### **Deleting a Channel**

- \_ Select a channel to delete with the ▲/▼/ ◀/▶ button.
- \_ Press the RED button. If you press the RED button again, the selected channel will be deleted.

While editing the programme, you can switch to the channel you select.

# **Basic Operation**





# Powering the TV On/Off

- 1. Connect the plug to the wall outlet.
- 2. Press the MAIN POWER button on the rear of the LCD-TV to turn the TV power on.
- 3. Press the STANDBY, TV/AV or CH +/- button on the front of the LCD-TV or press the STANDBY, TV/AV, CH +/- or NUMERICAL (0~9) buttons on the remote control to switch the TV on.

Note: To place the TV in standby mode, press the STANDBY button again on the remote control or on the front of the LCD-TV.


It can be useful when you wish to interrupt viewing temporarily (during a meal, for example).

To turn the TV power off, press the MAIN POWER button on the rear of the LCD-TV.

Note: Do not leave the TV in standby mode for too long (on holiday, for example). Turn the TV off by pressing the MAIN POWER button on the rear of the LCD-TV. It is best to disconnect the power cord.

# **Changing the Input mode**

- 1. Press the TV/AV button to change the input mode.
- 2. Select your desired mode using the ▲/▼ button, and press the **OK** button. You can also change the input mode by pressing the **TV/AV** button repeatedly.



MUTE

Φ

SLEEP



# **Volume Control**

- 1. Press the VOL +/- buttons to adjust the audio volume.
- 2. Press the MUTE button to mute the sound.

# **Selecting the Channel**

 Press the CH +/- or NUMERICAL (0~9) buttons to change the channel number.


# **Choosing Your Language**

When you start using your television for the first time, you must select the language which will be used for displaying menus and indications.

- 1. Press the MENU button.
- 2. Select **System** using the **△**/▼ button, and press the **OK** or ▶ button.
- **3.** Select **Language** using the **△**/▼ button, and press the ◀ or ▶ button to select a particular language.
- **4.** When you are satisfied with your choice, press the **EXIT** button to return to normal viewing.



# **Basic Operation**

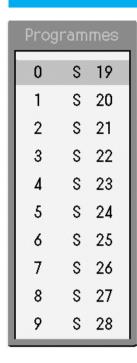


# **Listing Channels**

You can watch the programme list while watching analogue TV.

- 1. Press the LIST button.
- Select a channel using the ▲/▼ button, and press the OK button to switch to the selected channel. You can also move to the next or previous list page using the PAGE +/- button.

# Using the OK button



When you press the **OK** button, the information of the channel appears :

- \_ Channel number, channel name, and current time in the Analog TV mode
- \_ External input mode and current time in the **AV** input mode.
- \_ The information of Main and PIP screen in the **PIP** mode.

If you wish to disappear the information, press the **OK** button again. In the audio mode also, the information appears.

# **Using the Audio button**



You can hear the sound with various modes. ( Mono, Stereo, Dual mode)
Press the **SOUNDTRACK/AUDIO** button repeatedly to switch into other mode.


If it is not switched, it's the channel that various modes are not supplied.

# **Setting the Sleep Time**



You can select a time for the TV to turn off automatically. Press the **SLEEP** button repeatedly until the desired time appears. The number changes from Off .  $10 \cdot 20 \cdot 30 \cdot 60 \cdot 90 \cdot 120 \cdot 180 \cdot 240$ . When the selected time is out, the TV will turn off automatically. To cancel the sleep time, press the **SLEEP** button repeatedly and select **--- (Sleep Off)**.

# **Setting the Picture**







You can select the picture type you prefer.

- 1. Press the MENU button.
- 2. Select **Picture** using the **△**/**▼** button, and press the **OK** or **▶** button.
- Select Mode using the ▲/▼ button and press the ◀ or ▶ button to select a particular mode. If you select User, you can control the value manually.
   Standard: Dynamic: Movie: Mild: User
- **4.** On the Standard, Dynamic, Movie, or Mild, the value of the Brightness, Contrast, Sharpness and Colour is changed automatically. You can also set these options simply by pressing the **PIC MODE** (Picture Mode) button.

Item		Setting Change	
Brightness	Darker	<b>4</b> 0 ~ 100 ▶	Brighter
Contrast	Less	<b>4</b> 0 ~ 100 ▶	More
Sharpness	Less sharp	<b>4</b> 0 ~ 100 ▶	Shaper
Colour	Lower	<b>4</b> 0 ~ 100 ▶	Higher

Note: If you change the value of the Brightness, Contrast, Sharpness and Colour, the User is selected automatically.

# **Colour Temperature**


You can select the picture colour tone you prefer.

- 1. Press the MENU button.
- 2. Select **Picture** using the **△**/**▼** button, and press the **OK** or **▶** button.
- Select Colour Temperature using the ▲/▼ button and press the OK or ▶ button.
- **4.** Select **Colour Temp** using the **△**/**▼** button, and press the **◄** or **▶** button to select a particular colour tone. If you select **User**, you can control the value manually.


Normal: Cool: Warm: User

**5.** On the Normal, Cool, or Warm, the value of the R/G/B Gain is changed automatically.

Note: If you change the value of the R/G/B Gain, the User is selected automatically.



# **Setting the PIP/TWIN**





# PIP/TWIN

With PIP, Picture in Picture, you can call up a small screen within the main screen. This enables you to watch two different input sources at the same time. In this way, you can watch TV programme or monitor the video input from any connected devices while watching TV or other video input.

- 1. Press the MENU button.
- 2. Select **Picture** using the **△**/**▼** button, and press the **OK** or **▶** button.
- **3.** Select **PIP/TWIN** using the **△**/▼ button, and press the **OK** or ▶ button.
- Select Main Input using the ▲/▼ button, and press the ◄ or ▶ button to select a particular thing.

Digital TV: Analog TV: AV1: AV2: AV3: AV4: S-Video: Component: PC: DVI

5. Select **PIP/TWIN** using the **△/▼** button, and press the **◄** or **▶** button to select a particular thing.

\_ Off : Switch PIP mode off.

\_ PIP (Picture in Picture) : Switch PIP mode on.

\_ TWIN 1, TWIN 2 : Switch two Twin screen modes on.

(Twin screen 1, Twin screen 2)


6. Select PIP/TWIN Input using the ▲/▼ button, and press the ◀ or ▶ button to select a particular thing.

Digital TV: Analog TV: AV1: AV2: AV3: AV4: S-Video: Component: PC: DVI

Note: You can only select different inputs between Main Input and PIP/TWIN Input except Digital TV mode.

You can enjoy two digital channels simultaneously in each screen.

**7.** Select **PIP Position** using the **△**/**▼** button, and press the **◄** or **▶** button to move the PIP picture to another corner of the screen.

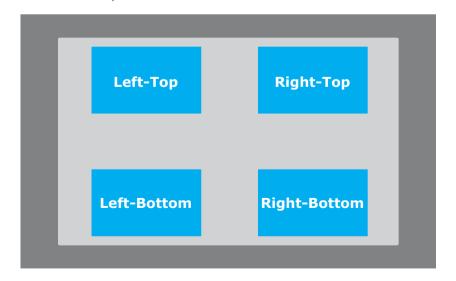


Note: If you wish to select PIP Position, you must set the PIP/TWIN mode to PIP.


# **Setting the PIP/TWIN**

**8.** Select **Swap** using the **△**/**▼** button, and press the **▶** button to exchange the picture in the main screen and small screen. Not available in PC Mode.


### In case of PIP

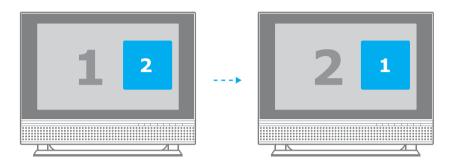

### In case of TWIN1 or TWIN2

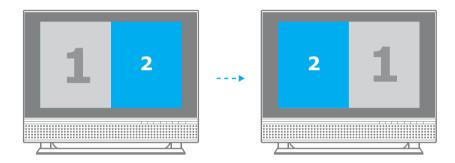

# **Using the PIP Buttons in the Remote Control**



You can use the PIP buttons on the remote control. Press **PIP/TWIN** button repeatedly during watching TV channel to switch into PIP or TWIN mode.

Press **PIP INPUT** button repeatedly to change the input mode in the small screen.

Press **PIP POSITION** button repeatedly to move the position of the small screen.

Press the **PIP CH+ / PIP CH-** button to change the TV Channels in the small screen.

Press **SWAP** button to exchange the picture in the main screen and small screen.

### Using the Digital Channels in PIP/TWIN Mode

You can watch two digital channels simultaneously using PIP/TWIN mode.

- 1. Press **PIP/TWIN** button during watching digital TV channel.
- Press PIP INPUT button repeatedly, and change to Digital TV mode in the small screen.
- 3. Press PIP CH+ / PIP CH- to change the channel in the small screen.

Note: There are the programme which you cannot watch in the small screen such as scrambled programmes or data programmes.



# **Changing the Sound**

You can select the preferred sound settings which corresponds with the personal sound settings.

- 1. Press the MENU button.
- 2. Select **Sound** using the **△**/▼ button, and press the **OK** or ▶ button.

#### **Effect**

Flat 4)

30

■L10

Off

On

SLEEP

Main Return

STANDBY (( )

MUTE

Effect

Treble

Balance

Auto Volume Level

TruSurround XT

Sound Source

Bass

- Select Effect using the ▲/▼ button and press the ◀ or ▶ button to select a particular thing. If you select User, you can control the value manually.
   Flat: Speech: Movie: Music: User
- **4.** On the Flat, Speech, Movie, or Music, the value of the Bass, Treble, and Balance is changed automatically. You can also set these options simply by pressing the **SND EFFECT** (Sound Effect) button.

Item		Setting Change
Bass Treble Balance	<ul><li>0 &gt;</li><li>0 &gt;</li><li>0 &gt;</li></ul>	Adjusts low sounds Adjusts high sounds Adjusts left and right volumes

Note: If you change the value of the Bass, Treble, and Balance, the User is selected automatically.

### **Auto Volume Level**

 Select Auto Volume Level using the ▲/▼ button and press the ◄ or ▶ button to select On or Off.

Note: Auto Volume Level can adjust the volume every time the channel is changed.

### **TruSurround XT**

 Select TruSurround XT using the ▲/▼ button and press the ◀ or ▶ button to select On or Off.

Note: The benefits of TruSurround XT sound are enormous. You can be completely enveloped in sound: just as if you were at a concert hall or cinema.

### **Sound Source**

**7.** Select **Sound Source** using the **△**/**▼** button and press the **◄** or **▶** button to select **Main** or **PIP/TWIN**.

Note: You can hear the sound of small screen or main screen according to your selecting.




# **Using the Sound Button in the Remote Control**

You can use the Sound button in the remote control. Press the **MUTE** button to mute the sound. If you press again, the sound will be reactivated.

# **Setting the Time**





# **Setting the Current Time**

You can set the current time. If you wish to use the Power On or Off Time, you must also set the Local Time.

- 1. Press the MENU button.
- 2. Select **System** using the **△**/▼ button, and press the **OK** or ▶ button.
- 3. Select **Time Setting** using the **△**/▼ button, and press the **OK** or ▶ button.
- **4.** Select **Date** using the **△**/**▼** button, and press the **OK** or **▶** button.
- **5.** Press the  $\triangle/\nabla/\triangle/$  button to set the current date.
- **6.** When you are satisfied with your choice, press the **OK** button to store the date.
- 7. Select **Local Time** using the **△**/▼ button, and press the **OK** or ▶ button.
- **8.** Press the  $\triangle/\nabla/4/\triangleright$  button to set the current time.
- **9.** When you are satisfied with your choice, press the **OK** button to store the time.

Note: The LCD-TV sets and updates the time automatically by the air, if you successfully search digital terrestrial channels.

You must set the GMT Offset value in DTV Setup menu. Refer DTV SETUP - Preferences - Local Setting menu for more detail information.

# **Automatically Turning the TV On and Off**

You can automatically switch on or off at the time you select.

- 1. Press the MENU button.
- 2. Select **System** using the **△**/**▼** button, and press the **OK** or **▶** button.
- 3. Select **Time Setting** using the **△**/▼ button, and press the **OK** or ▶ button.
- Select Power On/Off Time using the ▲/▼ button, and press the
   or ▶ button to select Enable or Disable.
- **5.** In the **Enable** mode, Select **Timer** using the △/▼ button, and press the **OK** or ▶ button.
- **6.** Press the  $\triangle/\nabla/\triangle/$  button to set the time.
- **7.** When you are satisfied with your choice, press the **OK** button to store the time.
- 8. Select Auto Power Off using the ▲/▼ button, and press the ◀ or ▶ button to select Enable or Disable. In setting the Auto Power Off to Enable, the LCD TV turns off automatically if there is no signal.

# **Setting the System**







# Language

- 1. Press the MENU button.
- 2. Select **System** using the **△**/▼ button, and press the **OK** or ▶ button.
- Select Language using the ▲/▼ button, and press the ◄ or ▶ button to select a particular language.

# **OSD Transparency**

- 1. Press the MENU button.
- 2. Select **System** using the **△**/▼ button, and press the **OK** or **▶** button.
- **3.** Select **OSD Transparency** using the **△**/**▼** button, and press the **◄** or **▶** button to set the transparency.

High: Medium: Low

# **AV2 Output**

- 1. Press the MENU button.
- 2. Select **System** using the **△**/▼ button, and press the **OK** or **▶** button.
- **3.** Select **AV2 Output** using the **△/▼** button, and press the **◄** or **▶** button to select a particular thing.

Digital TV: Analog TV: AV1: AV3

#### **Antenna Power**

- 1. Press the MENU button.
- 2. Select **System** using the **△**/**▼** button, and press the **OK** or **▶** button.
- 3. Select Antenna Power using the ▲/▼ button, and press the ◀ or ▶ button to select On or Off.

### **Aspect Ratio**

You can select the picture format you prefer.

- 1. Press the MENU button.
- 2. Select **System** using the ▲/▼ button, and press the **OK** or ▶ button.
- 3. Select **Aspect Ratio** using the ▲/▼ button, and press the ◀ or ▶ button to select a particular thing. You can also set the **Aspect Ratio** simply by pressing the **WIDE** button.

\_ **Auto** : The screen format will automatically become enlarged, allowing you to view the picture at its maximum size.

\_ 4:3 , 14:9 , 16:9 : Setting for the 4:3, 14:9, or 16:9 screen format.

**Zoom1, Zoom2**: Expansion to the Zoom1 or Zoom2 ratio.


Note: If you wish to change the Aspect Ratio, you must set the PIP/TWIN mode to Off.

# **Backlight Brightness**


- 1. Press the MENU button.
- 2. Select **System** using the **△**/▼ button, and press the **OK** or **▶** button.
- Select Backlight Brightness using the ▲/▼ button, and press the ◀ or ▶ button to set the brightness of LCD panel.

High: Medium: Low

# **Displaying the Teletext Information**







You can display Teletext information at any time on your TV. Most TV channels broadcast information via teletext. Each channel which broadcasts teletext transmits a page with information on how to use its teletext system. Depending on the TV channel, teletext is transmitted in different systems. The colours used in the options line correspond with the colour buttons of your remote control.

For Teletext information to be displayed correctly, channel reception must be stable, otherwise:

- + Information may be missing
- + Some pages may not be displayed


Press the **TELETEXT (**  $\blacksquare$  **)** button to display teletext. And you can control the Teletext functions using the following buttons.


# **Special Teletext Functions**


TELETEXT		Activate/Deactivate the teletext service.
MIX		Displays the teletext with the broadcasting screen.
INDEX	■i	Displays the teletext index page.
UPDATE	$\equiv$ X	Display the TV picture on the screen while waiting for the new teletext page.
REVEAL	<b>■</b> ?	Displays the concealed information.
MODE	■M	Displays the mode.
SIZE		Displays the text size as double size.
HOLD		Hold function during teletext display.
SUBPAGE	<b>E</b> 0	Search the sub-page using the sub-code.

You are in teletext mode, so only teletext functions are available.

# **Setting the PC Input**



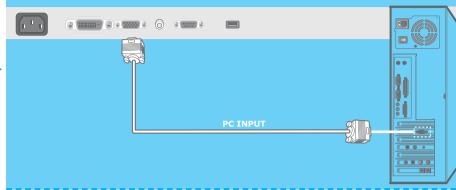



- 1. Press the TV/AV button to switch to PC mode.
- 2. Select PC using the ▲/▼ button, and press the OK button.
- 3. Press the MENU button.
- **4.** Select **PC Input Setting** using the **△**/**▼** button, and press the **OK** or **▶** button.
- **5.** Select the following item using the **△**/**▼** button, and press the **OK** or **▶** button.

**\_ Auto Configure :** Automatically optimizes the status of screen.


This is recommended when connecting a new PC.

**\_ Position** : Move the screen to the right, left, bottom or Up.

\_ Clock : Adjusts the horizontal size of screen by increasing or

decreasing the number of pixels.

**\_ Phase** : Sets the focus of screen.







# **Instant Recording**

Since the LCD-TV has a hard disk drive inside, you can record a programme with out an external media device such as a VCR.


- 1. Press the **RECORD** ( ) button on the remote control to record the current programme instantly.
- 2. You can change the recording duration time by pressing the **RECORD** ( ) button repeatedly.

30min -> 60min -> 90min -> 120min -> 240min -> 24hr Max

3. To stop the recording, press the STOP ( ) button. If there is no time delay while recording a programme, it will stop recording and return to the live broadcasting instantly. Otherwise, if there is a time delay, it will jump to the current point and return to the live broadcasting by pressing the **STOP (** button once again.

#### Note:

- right-hand side of the screen.
- You can reset the recording time while recording.
- Ensure that there is enough free space before recording, because if the free space on the hard disk drive is insufficient, recording will stop. Recording 1 hour of programme may require up to about 1GB of free space of hard disk space. The space for recording 1 hour of programme may be different depending on the programme recorded and the recorded quality.
- \_ It is possible that you may not record the scrambled programme or data programme normally.
- You cannot change to other channel during recording analogue channel or scrambled digital programme.
- Recording is not available in Component, DVI or PC Input sources.
- \_ You can change to other input source during recording
- You can playback the recorded programme during recording using trick play functions (FF, RW, Instant Replay, Repeat between A and B, Bookmark List and Add Bookmark). See the Playback Control.







# **Setting the Recording Quality**

- 1. Press the MENU button.
- 2. Select **Recording** using the ▲/▼ button, and press the **OK** or ▶ button.
- **3.** Select **Recording Quality** using the ▲/▼ button, and press the ◀ or ▶ button to select a particular thing.

**HQ (High Quality) : SP (Standard Play) : LP (Long Play)** 

Decreasing the record quality decreases the amount of disk space required to store the images, due to a higher compression scheme.



# **Setting the Clipping Noise Reduction**

When record the channel that input source is **AV** or **S-Video**, prefer to set the **CNR** (Clipping Noise Reduction) to **On**.

On certain Set Top Box or DVD Player, if the volume is too loud, may be occurred some noise during recording. In this instance, to reduce the noise, you must set the CNR (Clipping Noise Reduction) to On.

- 1. Press the **MENU** button.
- 2. Select **Recording** using the ▲/▼ button, and press the **OK** or ▶ button.
- Select CNR using the ▲/▼ button, and press the ◀ or ▶ button to select the On or Off.

# **Recording Reservation**

You can reserve recording to record your desired programme automatically. You can reserve recording of a programme using **Menu - Recording** - **Recording Schedule**.

# **Adding Recording Reservations**

- 1. Press the MENU button.
- 2. Select **Recording** using the **△**/**▼** button, and press the **OK** or **▶** button.
- Select Recording Schedule using the ▲/▼ button, and press the OK or ▶ button.
- Select a blank list using the ▲/▼ button, and press the OK button to add a new recording schedule.
- 5. Select Channel using the ▲/▼ button, and press the OK or ▶ button to change the channel. Change the Input source and channel No. using the ▲/▼/◄/▶/NUMERICAL(0~9) button. Press the OK to save the changed channel.
- 6. Select Date using the ▲/▼ button, and press the OK or ▶ button to change the date. Change the date using the ▲/▼/◄/▶/ NUMERICAL (0~9) button and press OK to save the changed date.
- 7. Select Start Time using the ▲/▼ button, and press the OK or ▶ button to change the start time. Change the start time using the ▲/▼/ ◀/▶/ NUMERICAL(0~9) button and press OK to save the changed start time.
- 8. Select Duration using the ▲/▼ button, and press the OK or ▶ button to change the recording duration. Change the recording duration using the ▲/▼/ ◀/▶/NUMERICAL(0~9) button and press OK to save the changed recording duration. (2 min ~ 24 hours)
- Select Repeat using the ▲/▼ button, and select one among Once ( 1 ),
   Daily ( 2 ) and Weekly ( 2 ) using the ◄/▶ button.
- 10. Select Title using the ▲/▼ button, and press the OK or ▶ button to display a keyboard on the screen. Enter the desired title on the screen keyboard using the ▲/▼/ ◄/▶ button.
- 11. Select Recording Quality using the ▲/▼ button, and select one among HQ (High Quality), SP (Standard Play) and LP (Long Play) using the ◀/▶ button.
- **12.** Select **Save** and press the **OK** button to complete the editing.
- 13. Select **Delete** and press the **OK** button to delete the editing.
- 14. Select Cancel and press the OK button to cancel the editing.

In Recording Schedule, you can move easily to the Recorded Programmes or HDD Control using the RED or GREEN buttons on the remote control.





### **Editing Recording Reservations**


- 1. Press the MENU button.
- 2. Select **Recording** using the △/▼ button, and press the **OK** or ▶ button.
- 3. Select **Recording Schedule** using the △/▼ button, and press the **OK** or ▶ button.
- 4. Select a reserved item which you want to edit using the ▲/▼ button, and press the **OK** button.
- 5. The next editing procedure is the same as Adding recording reservations.


When the reserved start time comes, the following message will be displayed on the screen;

If you select **Yes** and press **OK** button, the recording of the reserved programme is started.

#### Note:


- If the reserved start time comes in the standby mode, no sooner have you turn on the LCD-TV than the confirm message will be displayed on the screen.
- \_ If the programme to reserve overlaps with the existing one, adjust the reservation so as not to overlap.
- \_ If you want to stop on recording, press the STOP ( ) button.
- When you are recording the channel which is watching currently, the subtitle is recorded according to subtitle-setting in start of recording. When you are recording the channel which is not watching currently, the subtitle is recorded according to subtitle-setting in Menu (DTV SETUP - Preferences - Local Setting - Subtitle Language/Display).





# **Time Shifted Recording**

This LCD-TV automatically saves the programme on air in the installed hard disk drive temporarily, so that users can watch programmes as they watch a video tape using functions such as rewind, fast forward, instant replay and pause.





On the channel during time shifted recording, if you press the OK button, TSR On message is shown.

Note: If you press the PLAY/PAUSE ( ►/II ) button on the Time Shift
Off state, it will be switched to the Time Shift On automatically
and start the time shifted recording.


2. During time shifted recording, you can press the various playback buttons such as PLAY/PAUSE ( ►/II ), FORWARD ( ► ), REWIND ( ◄ ) or INSTANT REPLAY ( ♠) ) to playback the recording data saved temporarily in TSR buffer of the programme you are watching.

#### Note:

- \_ You cannot perform Repeat A-B ( A>B ) or Bookmark (国, 图) function during time shifted recording.
- If you want to playback the programme which is viewing-restricted or locked, will need the password.
- **3.** If you press a playback button, the TSR time bar will be displayed as following and the data will be played according to each playback function. For more information of the playback buttons, refer to **Playback Control**.

#### **TSR Time Bar**


TSR time bar displays the current operation status for playback of TSR data.

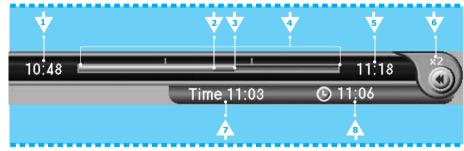


- 1. Start time of TSR time bar
- 2. Watching point
- 3. Live or broadcasting point
- 4. Total amount of programme saved to TSR buffer (max 30 minutes)
- 5. End time of TSR time bar
- Play status (The speed is shown in playing of fast-forward, fast-rewind, slow-forward, slow-rewind.)
- 7. The time of watching point
- 8. Current time (The time of live or broadcasting point)

When the play status is PLAY or LIVE on TSR time bar, if you take no action for about 3 seconds, TSR time bar will be minimized and displayed on the lower right-hand side of the screen. (Displays only play status.)





# Recording



- **4.** If you press the **STOP** ( ) button, the TSR time bar will disappear and the playback will be stopped.
- **5.** To stop the time shifted recording, press the **TSR** button until when **Time Shift Off** message appears.

#### Note:

- \_ It is possible that you may not record the scrambled programme or data programme normally.
- \_ Total TSR buffer is limited.
- \_ During the TSR playback or Programme Playback, the TruSurround XT and Auto Volume Level menus are disabled.






#### **Programme Playback**

You can watch the recorded programme by selecting a desired programme in the Menu - Recording - Recorded Programmes and pressing the OK or PLAY/PAUSE ( >/II ) button.

- 1. Press the MENU button.
- 2. Select **Recording** using the **△**/**▼** button, and press the **OK** or **▶** button.
- Select Recorded Programmes using the ▲/▼ button, and press the
   OK or ▶ button to display the recorded programme list.
- **4.** Select a desired programme to playback using the **√**/**▶** button, and then press the **OK** or **PLAY/PAUSE** ( **▶**/**II** ) button to playback the programme.
- **5.** Time bar appears as following and starts playback of the selected programme instantly.

#### **Time Bar**


Time bar displays the current operation status.

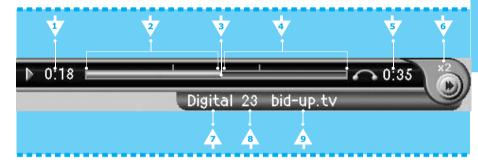

- 1. The playing time of watching point
- 2. The played amount of programme
- 3. Watching point
- 4. The non-played amount of programme
- 5. The total recorded time of programme
- 6. Play status (The speed is shown in playing of fast-forward, fast-rewind, slow-forward, slow-rewind.)
- Input source mode of the recorded programme (Digital, Analog, AV1/2/3/4, S-Video)
- 8. Channel number
- 9. Programme name

When the play status is **PLAY** on Time bar, if you take no action for about 3 seconds, Time bar will be minimized and displayed on the lower right-hand side of the screen. (Displays only play status.)

**6.** You can perform trick play functions like VCR functions such as rewind, forward, slow motion, pause, skip, and replay using the playback control or the additional buttons on the remote control during playback a programme.



**7.** Press the **STOP (** ■ **)** button to stop the playback. If the playback is ended automatically, the follow message appears and the recorded programme list appears again. (Playback is ended.)

#### Note:

- See the Playback Control for more information about each trick play function.
- \_ You can also playback the programme recorded in the external device (HDD) connected with LCD-TV by the same process.
- \_ 🥘 : Indicates the programme currently on recording.
- \_ **(3)**: Indicates the programme that the recording had been stopped in the middle of the reserved duration.
- \_ a : Indicates the programme is viewing restricted or locked.

  Requires the entering password.
- \_ During the TSR playback or Programme Playback, the TruSurround XT and Auto Volume Level menus are disabled.

In Recorded Programmes, you can move easily to the Recording Schedule or HDD Control using the RED or GREEN buttons on the remote control.

#### **Editing Recorded Programmes**

Select **Menu - Recording - Recorded Programmes**, and then select the desired recorded programme to edit the information of the programme.

#### **Editing Title**

You can edit the title of a recorded programme.

- **1.** Select your desired programme in the list using the  $\blacktriangleleft/\blacktriangleright$  button.
- 2. Select **Edit Title** using the △/▼ button, and press the **OK** button to display a keyboard on the screen.
- **3.** Enter the desired programme title on the screen keyboard using the  $\triangle/\nabla/\blacktriangleleft/\triangleright$  button.
- **4.** After finishing editing, select **Save**, and then press the **OK** button to complete.

#### **Delete File**

You can delete the recorded programme.

- **1.** Select your desired programme in the list using the **◄**/**▶** button.
- Select Delete File using the ▲/▼ button, and press the OK button.
   Display a message. (Do you want to delete this recorded programme?)
- **3.** Select **Yes** using the **◄/▶** button, and then press the **OK** button to delete the file. If you don't delete the file, select **No** and press the **OK** button.

#### **Copy File to External Device**

You can copy the recorded programme from/to external device.


- **1.** Select your desired programme in the list using the  $\blacktriangleleft/\blacktriangleright$  button.
- 2. Select Copy file to external device using the ▲/▼ button, and press the OK button. Display the progressing status including copied rate, elapsed time and remaining time. Please wait to copy to external device completely.
- **3.** When the file copy is finished, press the **OK** button. If you want to cancel the copying, select **Cancel** and press the **OK** button.

Note: The file format of external device must be FAT32 or Linux file format for copying to external device. If the file format of external device is mismatched to these file format, initialize the external device at Menu-Recording-HDD control menu.



#### **Connecting the External HDD**

You can also save/backup the recorded data to external storage device via USB port located on the rear of the LCD-TV. Connect a USB cable between an external storage device and USB port of the LCD-TV. Then, the External menu will be enabled.

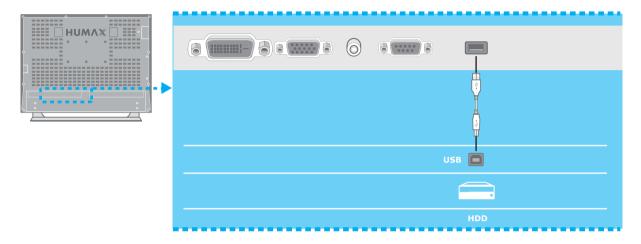

Note: It may not be compatible with the TV according to the sort of external HDD or its case.

#### **Playback Control**

You can perform playback control using playback buttons of the remote controller. You can use trick play functions during instant recording, time shifted recording or playing recorded programme.

#### **PLAY/PAUSE**



If you press **PLAY/PAUSE** (  $\blacktriangleright$ /II ) button on the remote controller on playing, the playing is paused. If you press **PLAY/PAUSE** (  $\blacktriangleright$ /II ) button on pausing, the playing is resumed from paused point.

Note: If you press PLAY/PAUSE ( ►/II ) button during watching TV or AV input, time shifted recording is started automatically.

#### **Rewind to Previous Scene**




Press the **REWIND** (  $\blacktriangleleft$  ) button on the remote controller to watch backward the scene passed by. Whenever you press the **REWIND** (  $\blacktriangleleft$  ) button, the rewind speed increases (x2, x4, x8, x16, x24). If you press the **PLAY/PAUSE** (  $\blacktriangleright$ /II ) button, the programme is played at normal speed. If you press the **REWIND** (  $\blacktriangleleft$  ) button on the pause state, the programme is played backward at slow speed (x1/2, x1/4, x1/8, x1/16, x1/24).

#### **Fast Forward to Next Scene**




Press the **FORWARD** (  $\blacktriangleright$  ) button on the remote controller to fast forward the programme. Whenever you press the **FORWARD** (  $\blacktriangleright$  ) button, the fast-forward speed increases (x2, x4, x8, x16, x24). If you press the **PLAY/PAUSE** (  $\blacktriangleright$ /II ) button, the programme is played at normal speed. If you press the **FORWARD** (  $\blacktriangleright$  ) button on the pause state, the programme is played forward at slow speed (x1/2, x1/4, x1/8, x1/16, x1/24).

#### Recording



Press the **RECORD** ( • ) button on the remote controller to start recording the current programme. For more information about recording refer to **Instant Recording**.

#### **Direct Jump**



If you press the  $\blacktriangleleft$  or  $\blacktriangleright$  button during playback, the moving focus appears in the progress bar. Move this arrow to a desired time point using the  $\blacktriangleleft/\blacktriangleright$  button. Press the **OK** button to play the programme at the moved time point. To return the arrow to original play position, press the **BACK** button.

#### **Instant Replay**



If you press the <code>INSTANT REPLAY</code> (  $\checkmark$  ) button, the current programme is played from the 10 seconds before.

#### Repeat between A and B



You can play special section repeatedly. You can set the section by pressing the A-B (  $A \triangleright B$  ) button twice. Press the A-B (  $A \triangleright B$  ) button once at the desired starting point, and press again at the desired ending point. Then, a mark for the A-B section repetition will be displayed and the section is played repeatedly. To stop the repetition play and return to the normal play, press the A-B (  $A \triangleright B$  ) button once again.

#### **Bookmark**

You can set bookmark where you want to save.

#### **Add Bookmark**



Press the **ADD BOOKMARK ( 智** ) button, when you want to save where you watch. No. and time of the added bookmark are shown on the screen. You can go to that position directly using bookmark list.

Note: The bookmark can be saved up to 5. If you save bookmark over 5, the first bookmark is deleted.


#### **Go to Bookmark**




Note: If you press the ADD BOOKMARK ( 種 ) button on displaying the bookmark list, you can add the watching position to bookmark list instead of the selected bookmark.

### **HDD Control**







#### **Checking the Hard Disk Drive**

You can check the free space of the hard disk drive, and can format the disk drive if necessary.

- 1. Press the MENU button.
- 2. Select **Recording** using the **△**/**▼** button, and press the **OK** or **▶** button.
- 3. Select HDD Control using the ▲/▼ button, and press the OK or ▶ button.
- Select Internal Device or External Device (if connected) using the 
   ◆/▶ button.
- **5.** You can check the total, TSR buffer, recorded and free space of each HDD.
- **6.** Select **Diagnosis** and press the **OK** button to diagnose the HDD. Diagnosing progress bar appears. After finishing diagnosing, confirm the message and press the **OK** button.
- **7.** Select **Format** and press the **OK** button to remove all the recorded programmes saved on the HDD and initialize the HDD.
- 8. Select Yes and press the OK button for the format confirm message, and then is started formatting the HDD. Formatting progress bar appears. To abort formatting, select Cancel and press the OK button, and then select Yes and press the OK button.

#### Note:

- You have to be careful because performing format deletes all the recorded programmes saved on the HDD.
- \_ In case of External Device, Remount or Disconnection menu appears. Please connect/disconnect safety using these menus.
- The file format of external device must be FAT32 or Linux file format for copying to external device. If the file format of external device is mismatched to these file format, you should initialize the external device at Menu-Recording-HDD control menu.
- \_ Don't unplug the power cord during format. If you did unplug it, you shoud perform the format again.


In HDD Control, you can move easily to the Recorded Programmes or Recording Schedule using the RED or GREEN buttons on the remote control.

# **HDD Control**

нимлж

#### **Connecting the External HDD**

You can also save/backup the recorded data to external storage device via **USB** port located on the rear of the LCD-TV. Connect a **USB** cable between an external storage device and **USB** port of the LCD-TV. Then, the External menu will be enabled.

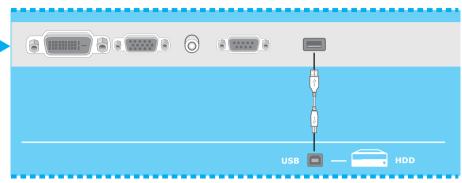

Note: It may not be compatible with the TV according to the sort of external HDD or its case.

# **Digital TV Channel Setup**

When you purchase your LCD-TV, you can run the Automatic Search. It immediately performs Channel Search. (You can also run the digital TV channel setup in Default Setting.)

- 1. Turns on the TV in the Digital TV mode.
- 2. Starts the Automatic Search immediately. Please wait for finishing the Channel Search. If you want to stop the Channel Search, select the OK button. If the Channel Search is stopped or finished, press the OK button to save the result of the channel search.

Once the channel search has finished, you can enjoy digital television.



Warning: If you exit the Automatic Search without fully completing the channel searching procedure, you may not have any digital TV channels stored. In this case, you can use the Installation Menu to configure your LCD-TV as required.

# **Basic Operation**

This chapter describes functions such as switching channel, changing language, and basic features for watching programmes.

#### **Switching Channel**

You can switch the current channel using one of the following methods.


- 1. Press the CH +/- button.
- 2. Enter your desired channel number using the NUMERICAL (0∼9) button to move to the channel directly.
- **3.** Press the **DTV CH** or **RADIO CH** button to switch between TV channel and Radio channel.


Note: You can switch channel using the channel list or programme guide.



#### **Changing the Subtitle Language**


If the current programme provides Subtitle information, you can select the language for the Subtitle.







**3.** Select **OFF** from the subtitle language list if you do not wish to display subtitles in the screen.



#### Note:

You can select a default subtitle language by selecting DTV SETUP - Preferences - Local Setting - Subtitle Language menu.

\_ In PIP/TWIN Input screen, the subtitle is not displayed.




If the current programme is available in multiple audio languages, you can select the language that you wish to listen in.




- Select your desired audio language using the ▲/▼ and OK button to change the audio soundtrack.
- Select Audio preference(left, right, stereo) using the ◀/▶ buttons.





4. Press the EXIT or SOUNDTRACK/AUDIO button to exit the soundtrack list.

# **Basic Operation**



#### Note:

- \_ you can select your desired default audio language by selecting DTV SETUP- Preferences - Local Setting - Audio Language menu.
- \_ If the programme is broadcast in Dolby Digital one, you cannot set the audio preference such as left, right, and stereo.
- \_ If you select Dolby Digital by selecting DTV SETUP Preferences -Local Setting - Audio Priority menu, Dolby Digital soundtrack is automatically used in preference to the default audio language.

#### **Programme Information-Information Banner (I-plate)**



Programme information is always displayed for a specific period of time whenever you switch channels. You can view the programme information by pressing the **INFO** button twice while watching a programme. Press the **EXIT** button to hide the I-plate.

#### **General Information**

The General Information is displayed at the bottom of the screen as followings.



- 1. Channel number and channel name
- 2. Programme name
- 3. Current time
- **4.** Detailed programme information : displayed if detailed programme information is provided.
- **5.** Next programme Information : displayed if next programme information is provided. Press the ▶ button to display the next programme information.

Note: If there is no available programme information, programme information is not displayed.

# **Basic Operation**

#### **Detailed Programme Information**




You can see detailed information about the current programme.
Press the **INFO** button.

#### Note:

- Press the INFO button again to hide the information box.
- \_ If the detailed programme information is more than one page, use ▲/▼ button to move to the previous or next page.



#### **Icons**

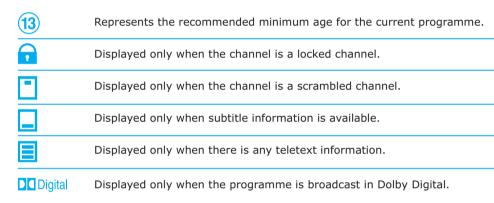

#### **MHEG Application**

The MHEG application makes possible not only access to the Internet and exchange e-mail through TV but also put the receiver directly into conventional television state.



- Press the TEXT button or the key which the data programme help you to press.
- Select your desired application using the button, and press the OK or ▶ button.

Note: Please refer to the detailed information of each MHEG application if you operate the MHEG application.

#### **Displaying and Switching Channel List**


You can display channel list using **LIST** button and switch to other channels on the channel list.



- Press the LIST button while watching a channel to display the channel list.
- Select your desired channel using the ▲/▼ button and press the
   OK button to change the channel.
- Enter the channel number directly using NUMERICAL (0~9) button to move cursor on to your desired channel. And then press the OK button to change to the selected channel.








#### Note:

- \_ Within the channel list, press the PAGE +/- buttons to move on page-by-page basis.
- \_ Whenever you press the DTV CH or RADIO CH button while the channel list is displayed, the channel list will be switched between the TV and Radio channel list.


#### **Editing Channels**

You can edit all channels or each channel by channel list group.



- 1. Press the **DTV SETUP** button.
- Select Edit Channels using the △/▼ button, and press the OK or ▶ button.
- Select Edit Channel Lists using the △/▼ button, and press the OK or ▶ button.
- You will be prompted to enter your password. Enter your password using NUMERICAL (0~9) buttons.





#### Note:


- \_ The Default Password is 0000. If you have forgotten your Password, please contact your local LCD-TV distributor.
- Press the BACK or ◀ button to save the changes and return to the previous menu, press the EXIT button to exit the menu screen.
- You can easily navigate all menus using the assigned number for each menu. Press the DTV SETUP button then select the numbers 2,1 to select Edit Channel Lists menu.

#### **Select a Channel Group**

You can select the channel list group to edit TV or Radio.

- **1.** Press the **OK** or **▶** button in **Group** to display channel list group.
- Select your desired channel list group using the ▲/▼ button, and press the OK button.






#### Note

- Press the DTV CH or RADIO CH button to move to TV or RADIO channel list directly.
- \_ For editing Favourite channel list, move to DTV SETUP Edit Channels -Edit Favourite Channels menu.

#### **Delete Channels**

You can delete one or more channels.



- Move the cursor to the channel list using the ◀/▶ button.
- Select your desired channel, and then press the OK button. You can select multiple channels.
- Select **Delete** in the right using the ▶ button, and press the **OK** button.



#### **Lock/Unlock Channels**

You can lock or unlock one or more channels.

- Move the cursor to the channel list using the ◀/▶ button.
- 2. Select your desired channel, and then press the **OK** button. You can select multiple channels.
- Select Lock in the right using the ▶ button, and press the OK button.



#### **Select/Unselect All Channels**


You can select/unselect all channels at a time.

- **1.** Select **Select All** in the right and press the **OK** button to select all channels.
- **2.** Select **Unselect All** in the right and press the **OK** button to unselect all the selected channels.



#### **Editing Favourite Channels**


You can edit Favourite channel or Favourite channel list.



- 1. Press the **DTV SETUP** button.
- Select Edit Channels using the ▲/▼ button, and press the OK button.
- 3. Select Edit Favourite Channels using the △/▼ button, and press the OK or ▶ button.
- Select a channel using the

   △/▼ button, and press the

   OK button. The selected channel
   is moved into the Favourite.



Move between TV and Favourite using the ◄/► button. In this way, you can return the channel.

#### Note:



- \_ Press the DTV CH or RADIO CH button to move to TV or RADIO channel list directly.
- \_ Press the BACK or ■ button to save the changes and return to the previous menu. Press the EXIT button to exit the Menu screen.

# **Programme Guide**

The Programme Guide displays programme information about each channel, based on the date and time. You can also schedule your recording using the information given.

Note: Press the GUIDE button to exit the Guide screen.

#### **Viewing Programme Guide Information**


You can view programme information for all channels.



- 1. Press the GUIDE button.
- Move to previous or next programme within the same channel using the ◄/▶ button.




- **4.** Select your desired programme, and press the **OK** button. Then you can watch the programme if it is on air, or you can reserve it if it is the future programme.
- Press the INFO button in the selected programme to view Extended Information for the selected programme.



#### **Viewing Guide Information by Another Group**

You can view programme information for desired channel list by groups.

1. Press the GUIDE button.



- 2. Press the **RED** button to change the channel list group or press the **DTV CH**, **RADIO CH**, or **FAV CH** buttons.
- 3. The Programme Guide for selected channel list is displayed.

Note: Press the DTV CH or RADIO CH button to move to TV or RADIO channel list directly.

### **Programme Guide**

#### **Viewing Programme Information Using Time Bar**

You can quickly search for your desired time slot using the Time bar.



- 1. Press the **GUIDE** button.
- **2.** Press the **GREEN** button to display the Time Bar.
- Select the each button using the
   ◄/▶ button, and press the
   OK button to move as your desired amount of time. If you press the button repeatedly, the same operation is repeated.
- 4. Each button functions as follows.



**Now**: Moves to the current programme where the cursor is located.


- : Moves to the previous programme or 30 minutes before.
- Moves to the next programme or 30 minutes after.
- ♣ : Moves to 2 hours before.
- Moves to 2 hours after.Day: Moves to one day before.
- **Day**▶ : Moves to one day after.

Note: The guide provides programme information from the previous day to the next 7 days.

#### **Finding a Programme**

You can find your desired programme by programme name or genre.

#### **Finding a Programme by Programme Name**



- 1. Press the GUIDE button.
- **2.** Press the **BLUE** button to display Find screen.
- **3.** Enter the programme name directly using the keyboard displayed on the screen.
- When completing entering programme name, select the Find, and press the OK button.



#### Note:

- \_ Select **△/▼/ √/ button** and then press **OK** button to enter the programme name on the keyboard screen.
- \_ If you select Previous or Next on the Keyboard displayed on the screen and press OK button, the keyboard layout is switched.

# **Programme Guide**





- 1. Press the GUIDE button.
- **2.** Press the **BLUE** button to display Genre screen.
- Select By Genre and press the OK button to search programme by genre.
- Select your desired genre using
   ▲/▼/ ◀/▶ button and press the
   OK button.
- 5. If you select your desired programme from the Found Programme List screen and press the OK button, you can watch the programme if it is on air.

Note: The Found Programme List may differ depending on the provided programme information.





#### Adding Reservations by Guide

You can automatically reserve to watch your desired programme.

- **1.** Select the scheduled programme and pressing the **OK** button.
- Select OK using ◀/▶ button and press the OK button.
- **3.** When reservation has been completed, the icon ( ) is displayed on the reserved programme.



#### When you cancel the reservation

- **1.** Select the reserved programme and press the **OK** button. The message will be displayed.
- ${\bf 2.}$  Select  ${\bf OK}$  and press the  ${\bf OK}$  button to cancel the reservation.

Note: You can look into reservation schedule using YELLOW button in guide.

You can set censorship classification, password, time and other options to enhance your viewing pleasure.



#### Note

- Press the BACK or ◀ button to save the changes and return to the previous menu. Press the EXIT button to exit the Menu screen.
- You can easily select all menu items using the assigned numerical button for each menu.

#### **Parental Control**

You can set parental control for each programme. You can also change your password.




- 1. Press the DTV SETUP button.
- Select the Preferences using the ▲/▼ button, and press the OK or ▶ button.
- Select the Parental Control using the ▲/▼ button, and press the OK or ▶ button.
- 4. When prompting message is displayed to ask Password, enter the Password using the NUMERICAL (0~9) buttons.



#### **Setting Censorship Classification**

**Censorship Classification** allows you to block programmes according to the age level you have set.

- Select the Censorship Classification using the ▲/▼ button, and press the OK or ▶ button.
- Select your desired Age Level using the ▲/▼ button, and press the OK button.



View All: All programmes can be watched because there is no age limitation.

? Programmes are blocked under the age of 7.
Programmes are blocked under the age of 12.
Programmes are blocked under the age of 15.
Programmes are blocked under the age of 18.

**Lock All**: All Programmes are blocked without considering the age level.

Note: You have to enter your password to watch the programme which is blocked by the age restriction.

#### **Changing Password**

You can change the current password into a new one.


- Select Change Password using the △/▼ button, and press the OK or ▶ button.
- Enter New Password using the NUMERICAL (0~9) button, and select OK and press OK button.
- Enter the New Password again to confirm the Verify Password, and select OK and press the OK button.



Note: The Default Password is **0000**. If you have forgotten your Password, please contact your local LCD-TV distributor.

#### **Local Setting**

You can set a Language for Audio, and Subtitles and set the current time.



- 1. Press the **DTV SETUP** button.
- Select Preferences using the △/▼ button, and press the OK or ▶ button.
- Select Local Setting using the △/▼ button, and press the OK or ▶ button.



#### **Setting Current Time**

You can set the GMT Offset for the current time.

- 1. Select **GMT Offset** using the **△**/▼ button.
- 2. Press the OK or ▶ button to display GMT list. GMT can be changed in 30 minutes / 1 hour steps.
- **3.** Select your GMT offset using the **△**/**▼** buttons, and press the **OK** button.

Note: The current time is set automatically whenever GMT Offset changes.

The default item is Auto. If GMT Offset is Auto, the time will change to summer time (BST).

#### **Audio/Subtitle Language**

You can set the language for Audio and Subtitles. The default language is English.

- 1. Select Audio / Subtitle Language using the ▲/▼ button.
- 2. Press the OK or ▶ button to display the available Language List.
- 3. Select your desired language using the **△**/**▼** button, and press the **OK** button.

#### **Audio Priority**

You can select the audio priority between language and Dolby Digital.

- 1. Select Audio Priority using the ▲/▼ button.
- 2. Press the OK or ▶ button to display either Language or Dolby Digital.
- **3.** Select your desired option using the **△**/**▼** button, and press the **OK** button.
  - **+ Language** : You can watch a programme in the selected language.
  - + Dolby Digital: You can listen in Dolby Digital sound.

#### **Subtitle Display**


You can select whether or not to display the Subtitle automatically if provided.

- 1. Select **Subtitle Display** using the **△**/▼ button.
- 2. Select your desired option using the **OK** or ▶ button.
  - **+ Auto** : Subtitles are displayed automatically in the predefined subtitle language.
  - + Manual: Subtitles are displayed in the language when you select the subtitle language by pressing the **SUBTITLE** button on the remote control.

#### **Subtitle Font**


You can select the Subtitle font.

- 1. Select the **Subtitle Font** using the **△**/▼ buttons.
- 2. Select your desired option using the **OK** or ▶ button.
  - + Variable: Uses the horizontally variable Subtitle Font.
  - + **Fixed**: Uses the fixed Subtitle Font.









- 1. Press the DTV SETUP button.
- Select Preferences using the 
   △/▼ button, and press the
   OK or ▶ button.
- Select Miscellaneous Settings using the ▲/▼ button, and press the OK or ▶ button.



#### i-Plate Display Time


You can set the duration during which the Information box is to be automatically displayed when you switch the channel.

- 1. Select i-Plate Display Time using the △/▼ button, and press the OK or ▶ button.
- Select a value between **Disable**, 1 ~ 20 seconds using the ▲/▼ button, and press the **OK** button.

### **Installation**

#### **Automatic Search**

If your LCD-TV is connected to a suitable aerial (outdoor aerial recommended) you can automatically search channels without entering any other information.



- 1. Press the DTV SETUP button.
- Select Installation using the △/▼ button, and press the OK or ▶ button.
- Select Automatic Search from Installation menu using the △/▼ button, and press the OK or ▶ button.



#### Search

Please wait while the LCD-TV searches for the channels, this may take a few minutes.

- During the automatic search procedure, the cursor is located at Stop. If you press the OK button during the search, the operation is stopped and the channels found thus far will be displayed.
- 2. If despite successful completion of search operation the some or all channels have been not found, press the OK button and perform to reset the search operation again if necessary.
- 3. You can delete unnecessary channels from the found channels. Select your desired channels to delete and press the OK button. Then select Delete and press the OK button. To delete all channels, select Select All to select all channels, select Delete, and press the OK button.
- 4. When completing Channel Search and deleting unnecessary channels, select Save to save the changes.






# **Installation**

#### **Manual Search**

You can search channels manually by searching parameters, if you know the multiplex-parameters (check with your local broadcaster).



- 1. Press the DTV SETUP button.
- Select Installation using the △/▼ button, and press the OK or ▶ button.
- 4. Select Channel, Frequency, Mode, Guard Interval, or Network Search using the ▲/▼ button, and press the OK or ▶ button.



#### **Channel Number**

Enter your desired frequency channel number to search. When entering frequency channel number, the appropriate frequency value is automatically displayed in **Frequency**. Select one of channel using the  $\triangle/\nabla$  button, press the **OK** button.

#### **Frequency**

Enter your desired frequency to search directly. When entering the frequency, the appropriate channel for the entered frequency is automatically displayed in **Channel**. Enter frequency using the **NUMERICAL (0~9)** button and press **OK** button.

#### Mode

Required for Channel Search. If you don't know the value, please select **Auto**. Select among **Auto**, **2k** and **8k** using the  $\triangle/\nabla$  button, and press the **OK** button.

#### **Guard Interval**

Required for Channel Search. If you don't know the value, please select **Auto**. Select one option among **Auto**, 1/4,1/8,1/16 and 1/32 using the  $\triangle/\nabla$  button, and press the **OK** button.

#### **Network Search**

If specified frequency channel information and other channel information are provided together, the channel, which belongs to other frequency channel, is also searched. Select one option between **Enable** and **Disable** using the button.


### **Installation**

#### **Default Setting**


Default Setting restores the LCD-TV to the default settings

Warning: Please Note that once you perform Default Setting, all data such as Aerial Setting information Channel List, and User Configured data are deleted.

#### **To perform Factory Default:**



- 1. Press the DTV SETUP button.
- Select Installation using the △/▼ button, and press the OK or ▶ button.
- Select Default Setting using the △/▼ button, press the OK or ▶ button.
- 4. Select **Yes** and press the **OK** button to restore all setting to Factory
  Default. Select **No** and press the **OK**or **BACK** button to return to the previous menu.



**6.** When default setting is completed, Installation Wizard is automatically displayed, which helps Channel Search. For detailed information about Installation Wizard, refer to **Digital TV Channel Setup**.

Note: In the Default Setting, you need a Password to enter. The Default Password is 0000. If you have forgotten your Password, please contact your local LCD-TV distributor.



In order to maintain proper performance of this LCD-TV, it is essential to have the most up-to-date software. The latest news and release of software versions may be found at the **HUMAX website**. http://www.humaxdigital.com.

It is recommended that you periodically check for the availability of software update.

#### **OTA (Over the Air)**

OTA, an abbreviation of **Over-the-Air**, means that the software can be downloaded through your aerial. The manufacturer reserves the right to decide when and where to release software by this process. The software update via your aerial will only occur under the following circumstances.

1. The equipment should have appropriate loader software inside LCD-TV.

Caution: Please note that if you don't have the official loader software, the equipment may not function correctly after a software update.

- **2.** The manufacturer decides to release software downloading via a designated antenna system.
- **3.** The equipment must be **tuned** properly following the guidelines within this manual
- **4.** Upgrade software when the quality of the receiving signal strength is high. If poor weather conditions where the quality of receiving signal is not high, please perform the software update later.

#### Caution

- Please be careful to keep the power on and the power cord plugged in during software update.
- \_ Please be careful not to pull out the aerial (co-axial Cable) during software update. The update may be interrupted and the LCD-TV may not work.


#### Note:

- \_ Other functions of the LCD-TV will not work at all during software update.
- \_ Scheduling operation will not work during software update.

#### If new software is found when powering on

- 1. A message will be displayed to notify that new software is found.
- 2. Select **Yes** and press the **OK** button to update the software.
- 3. Starts downloading new software. Please wait until the updated is completed.
- **4.** When completing the software update, the equipment is automatically powered off and on again.

#### If updating software from Menu



- 1. Press the DTV SETUP button.
- Select Installation using the △/▼ button, and press the OK or ▶ button.
- Select Software update using the ▲/▼ button, and press the OK or ▶ button.



#### **Automatic Update**

You can set the LCD-TV to find HUMAX software updates and update software automatically.

Automatic Update

Current Version

- Select Automatic Update using the ▲/▼ button, and press the OK or ► button. Automatically search for new software.
- When detecting updated software, the following result is displayed.
   If new software is not found by Automatic Update, use Manual Update.
- 3. Select Yes and press the OK button to start updating. Select No and press the OK button to return to the previous menu without updating. Select Later and press the OKbutton to update later. That means the update menu displays as soon as you turn on the LCD-TV next time.
- **4.** Performs Software Update. Please wait until it is completed.
- When completing the software update, the LCD-TV is automatically powered off and on again.

#### **Manual Update**

You can perform Manual Update only if you know the multiplex information of the software update correctly.

- Select Manual Update using the ▲/▼ button, and press the OK or ▶ button.
- 2. Select the channel number which provides updated software. You can also enter the frequency instead of channel number in which updated software is provided.
- Select Mode. If the information is not known, then Auto can be selected.



Select Guard Interval. If the information is not known, then Auto can be selected.

Note: How to set parameters in Manual Update is the same as how to set parameters in Manual Search. Refer to Manual Search.

- **5.** Select **Search** and Press the **OK** button to search software.
- 6. It will display whether or not New Software exist. If new software does not exist, press the OK button to return to the Manual Update Menu.
- 7. Select Yes and press the OK button to start updating. Select No and press the OK button to return to the previous menu. Select Later and press the OK button to update later.



- 8. Performs Software Update. Please wait until it is completed.
- **9.** When completing the software update, the LCD-TV is automatically powered off and on again.

#### **Software Auto-Detecting and Time**

You can specify the software detecting time. If the LCD-TV powers on during software auto-detecting, Detecting will stop.

- Select Software Auto Detecting using the ▲/▼ button, and press the OK or ▶ button.
- 2. Select **Enable** or **Disable** and press the **OK** or ▶ button whether or not setting the software detecting time automatically.
- **3.** When you select **Enable**, you can set the detecting time in the **Auto Detecting** Time.

#### **Software Update from PC**


You can connect your LCD-TV to the PC directly and update your software by transferring the new software from the PC. Follow these steps to download new software from a PC to this LCD-TV.

- **1.** Download new software file(HDF) suitable for this LCD-TV model from our website into your computer (http://www.humaxdigital.com).
- 2. Download and install download tool from our website into your computer.
- 3. Connect your PC to this LCD-TV with an RS-232C serial cable(not supplied).
- **4.** Execute installed download tool, and then follow the instructions contained within the download tool.
- **5.** Reconnect the power cable of the LCD-TV and press the **STANDBY** button to start download.




You can also start download using only the STANDBY button.

Switch off the LCD-TV by pressing the STANDBY button and press again the STANDBY button after about 1 minute.



# **System Information**

You can view all system information, and signal detection.




- 1. Press the DTV SETUP button.
- 2. Select **System** using the **△**/▼ button, and press the **OK** or ▶ button.



#### **Status**

You can view the System information

- 1. Select **Status** using the **△**/**▼** button, and press the **OK** or **▶** button.
- 2. Confirm the information about Hardware version,
  Software version, Loader version,
  System ID, and Update Date.



#### **Signal Detection**

You can view the signal strength and signal quality reception for the channel that is currently being viewed.

- Select Signal Detection using the ▲/▼ button, and press the OK or ▶ button.
- 2. Display information about the aerial and multiplex, which current channel belongs to and the graphs and percentage of Signal Strength and Quality of the channel.



# **System Information**

#### **Common Interface**

You can view the current status of the CI module.

- Select Common Interface using the ▲/▼ button, and press the OK or ▶ button.
- Select Slot 1, and press the
   OK or ▶ button.
- **3.** If Common Interface is available, you can view information about each Slot.



Note: The displayed information about each Common Interface may differ depending on Common Interface type.

# Game


This LCD-TV provides various games for user's entertainment.




- 1. Press the DTV SETUP button.
- 2. Select **Games** using the **△**/▼ button, and press the **OK** or **▶** button.
- According to the instruction displayed on screen, you can enjoy the game using ◄/▶ and OK button.

Note: Press the EXIT or BACK button to exit the game.

# **Menu Map**

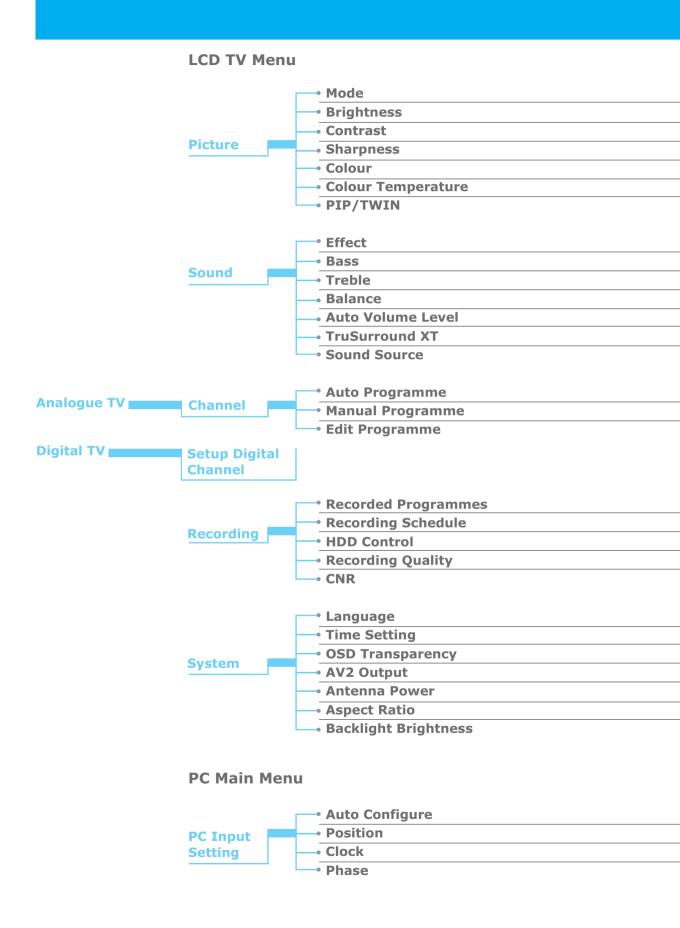

# **Menu Map**

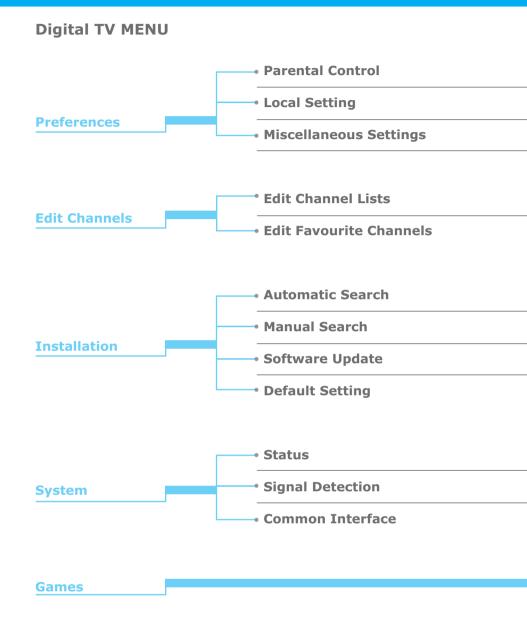

# **Troubleshooting**

#### **Troubleshooting**

Before contacting your local service dealer, please make sure you refer to the following guide. If the LCD-TV does not work normally after completing the following trouble shooting, please contact your local LCD-TV distributor or service centre.

#### 1. No message is displayed on the front panel or the LCD-TV has no power

- + Check the main power cable and check that it is plugged into a suitable power outlet.
- + Check whether the Power Switch is On.

#### 2. No picture

- + Make sure that the LCD-TV is in Operation Mode.
- + Make sure that the AV Cable(SCART, SVHS, etc) is firmly connected to the LCD-TV.
- + Make sure that the aerial is correctly connected to the equipment.
- + Make sure that the aerial Setting is correct.
- + Check the brightness level of the LCD-TV.
- + Check the channel is on air.

#### 3. Poor picture & sound quality

- + Install aerial make sure to avoid putting mobile phone or mircrowave oven near around the equipment.
- + Use 75  $\ensuremath{\Omega}$  coaxial cable to connecting LCD-TV and aerial.

#### 4. No or poor sound

- + Check the volume level of the LCD-TV.
- + Check the Mute status of the LCD-TV.
- + Press the Audio button to change the Sound Track type.

#### 5. Remote Control does not operate

- + To manipulate the equipment with Remote Control, the remote control's emitting part should be pointed directly towards the receiving part of LCD-TV's remote sensor.
- + Check the battery of remote control.

# **Troubleshooting**

### **Error Message**

Error message	Possible causes	What to do
No or bad signal	+ The aerial is not installed correctly.	<ul> <li>+ Adjust aerial.</li> <li>+ Check the cable from the aerial. If you cannot resolve the problem you may need to have your aerial and installation tested by a professional.</li> </ul>
The channel is scrambled or not available.	<ul><li>+ The channel has a signal but no audio or video.</li><li>+ The channel is for data broadcasting.</li></ul>	<ul><li>+ Confirm if the channel is currently on air.</li><li>+ You cannot watch the channel in the usual way.</li></ul>
The channel is scrambled.	+ This digital terrestrial receiver does not support the service that enables descrambling of the scrambled channels.	+ Please contact your local dealer for an appropriate CI Module and viewing card.
The audio is not available.	+ The channel has signal, but no Audio.	+ Press the <b>DTV / AUDIO</b> button to confirm if the channel has Audio.
The fan is out of control: please turn it off.	+ The fan is out of order.	+ Please turn it off. *Contact the call center immediately.

# **Troubleshooting**

#### **Error Message**

Problem	Check item	
No picture on screen and No sound from speakers.	<ul> <li>+ Insert the AC power cord plug securely in AC power outlet.</li> <li>+ Make sure the remote control is not in the standby mode (The POWER/Standby indicator is Orange colour.)</li> <li>+ Turn on the MAIN POWER button on the bottom of the display.</li> </ul>	
No picture / No picture from AV terminal.	<ul><li>+ Check the brightness setting of the display.</li><li>+ Lamp may have malfunctioned.</li><li>+ Check the cable from the VIDEO INPUT terminal.</li></ul>	
Picture is displayed, But no sound from the Speakers.	<ul> <li>+ Check the sound setting.</li> <li>+ Make sure the sound is not muted.</li> <li>+ Make sure headphones are not connected.</li> <li>+ Check the setting of AV OUTPUT terminal.</li> </ul>	
Picture is too light.	+ Check the COLOUR and CONTRAST settings.	
Picture is too dark.	+ Make sure the BRIGHTNESS setting is not set too low.	
Remote controller does not work.	<ul><li>+ Change the batteries.</li><li>+ Make sure the LCD-TV remote sensor is not facing a strong light source.</li></ul>	
The picture is not sharp. The picture moves.	<ul> <li>+ The reception may be weak.</li> <li>+ The quality of the broadcast may also be poor.</li> <li>+ Make sure the aerial is facing the right direction.</li> <li>+ Make sure the outside aerial is not disconnected.</li> </ul>	
The picture is double or tripled.	<ul><li>+ Make sure the antenna is facing the right direction.</li><li>+ The signal may be reflected from mountains or buildings.</li></ul>	
The picture is spotted.	<ul> <li>+ There may be interference from cars, trains, high voltage lines, neon lights, etc.</li> <li>+ There may be interference between the aerial cable and power cable.</li> <li>+ Try positioning them further apart.</li> </ul>	
There are strips on the screen or colours fade.	<ul> <li>+ Is the unit receiving interference from other devices?</li> <li>+ Transmission antennas of radio broadcasting stations and transmission antenna of amateur radios and cellular phones may also cause interference.</li> <li>+ Use the unit as far apart as possible from devices that may cause possible interference.</li> </ul>	

# **Specification**

#### **Specification**

Item		Specification			
	+ Type	- Colour active matrix TFT-LCD			
	+ Display Area	- 26.0" (566.4(W) x 339.84(H) mm)			
	+ Display Colour	- 16.7 M			
	+ Pixel Pitch	- 0.4425mm x 0.4425mm			
	+ Max. Resolution	- 1280 x 768 pixels			
LCD Panel	+ Interface	- LVDS Interface with 1 pixel / clock			
	+ Viewing Angle	- R/L : 170 , U/D : 170 (CR ≥ 10)			
	+ Contrast Ratio	- 800:1 (Typ)			
	+ Brightness	- 450 cd/㎡ (Typ)			
	+ Horizontal Frequency	- 48.5 kHz (Typ)			
	+ Vertical Frequency	- 60Hz (Typ)			
	+ Dimension	- 627.0 (H) x 389.0 (V) x 49.0 (D) mm (Typ)			
	+Sync	- Separate			
DC Monitor	+Horizontal Frequency	- 31~61kHz			
PC Monitor	+ Vertical Frequency	- 56~75Hz			
	+ Max. Resolution	- 1280 x 768 pixels@60Hz			
		- Analog Tuner(1), Digital Tuner(2), SCART(3), RCA, RGB,			
Input /	+ Video Input	S-Video, Component, DVI			
Output	+ Audio Input	- PC Audio, Component (R / L), RCA (R / L)			
	+ Audio Output + Data Interface	- S/PDIF, Speaker, Headphone			
	+Data Interface	- RS-232C (for S/W Upgrade), USB 2.0 (for PVR)    Analogue   Digital			
	+ Area	- EU	- EU (MHEG)		
TV Signal	+ Antenna Input	- IEC 169-2 Female	- IEC 169-2 Female		
	+ Tuning System	- FS	- OFDM DVB-T		
	+ Colour System	- BG, I, DK	- BG, I, DK		
	+ Sound System	- Nicam, A2	- MPEG1 Layer 1/2		
	+ VHF Low	- 48.25 ~ 158.00MHz	- 51MHz ~ 858MHz		
	+ VHF High	- 160.00 ~ 442.00MHz			
	+ UHF	- 442.00 ~ 863.25MHz			
	+ Teletext	- Yes	- Yes		
	+ Safety	CE			
Regulation	+ EMI	- CE - CE			
Others	+ Power	- 145 Watt (Typ)			
	+ Speaker Output	- 7W x 2EA			
	+ Plug & Play Level	- DDC 1/2B			
	+ Weight	- NET 22.5Kg / Gross27.5Kg			
	+ Power Supply	- AC 100 ~ 240V, 50/60 Hz			
	+ HDD	- 40G			

# **Glossary**

#### Programme Guide (Electronic Programme Guide, EPG)

A electronic program guide (EPG) is transmitted by the broadcasters.

#### **Frequency**

The number of cycles or events per one second, which is expressed in the unit of hertz

#### FTA (Free- To-Air)

An unscrambled broadcast, which you can view without additional payments to a service provider.

#### Hi-Fi (High Fidelity)

The characteristics of audio devices that can play back all the audio frequencies, which are in the range of  $16 \text{Hz} \! \sim \! 20 \text{KHz},$  uniformly from low frequencies to high frequencies.

#### OSD (On Screen Display)

The function that displays the information about the monitor that the user needs or has to know on the screen directly. OSD information includes brightness, contrast, tuning, RGB adjustment, and screen size and positions (top, left, width, and height), and so on.

#### OTA (Over The Air)

An abbreviation of over the air, means that software can be downloaded through your aerial.

#### **SCART**

A 21-pin connector used for connection of this LCD-TV to your VCR or DVD player.

#### S/PDIF (Sony/Philips Digital Interface format)

Optical format for digital audio output. It outputs audio signals directly as digital audio signals without changing into analogue signals because conversion into analogue signals can degrade signal quality.

# **Service and Support**

You can get information such as a troubleshooting guide, software upgrades and product support guide from the following web sites and call center (Hotline). Please try to contact to your local dealers first when you have any problem.

#### Web site and e-mail

#### **Homepage**

http://www.humaxdigital.com (English)
http://www.humaxdigital.com (Deutsch)
http://www.humaxarabia.com (Arabic)

#### **HCSA (Humax Customer Service Area)**

Software Download, Information and Technical Q&A

http://www.humaxdigital.com / hcsa (English) http://www.humaxdigital.com /Deutsch / hcsa (Deutsch)

#### E-mail (Technical Q&A)

tech-info@humax-digital.co.uk (Europe & North Africa)

techinfo@humax-digital.de (Germany)
callcenterME@humaxdigital.com (Middle East)
Webmaster@humaxdigital.com (Asia & Other area)

#### **Call Center**

#### **HUMAX Hotline (United Kingdom)**

Tel: 0870 247 8800 Fax: +44 2891 812 932

E-mail: uksupport@humax-digital.co.uk Open : Local Time in UK (GMT+0) 08:30~18:00 (Monday - Friday) Support Language : English

#### **HUMAX Hotline (Germany)**

Germany: 01805 778 870 (0,12/Min)

Other Countries: + 49 1805 778 870 ( 0,12/Min+ International Call Charge)

Open: Local Time in Germany (GMT+1) 08:00 - 20:00 (Monday - Friday)

08:00 - 18:00 (Saturday)

Support Language: Deutsch/English

#### **HUMAX Hotline (Italy)**

Tel: 899 100080 Fax: +39 0471 543749 E-mail: info@mediasat.com Open: Local Time in Italy (GMT+1) 08:00~18:00 (Monday - Friday) Support Language: Italian

For hardware repair, please refer to support website. (Homepage or HCSA)

**HUMA**%

# LCD-TV Digital and Analogue